



PRODUCT FEATURES:

Offers several application possibilities, directing the beam in different inclinations and axes, allowing the fixture to adapt very well to the architectural scene.

Designed to last in extremely harsh environments.


RECOMMENDATIONS FOR THE USER:

- 1) Before the installation, make sure that there is no voltage.
- 2) Do not touch the fitting when it is working on / switched on
- 3) Do not look at the fitting directly or from a short distance.
- 4) Disconnect / switch off the fitting before changing the lamps


NOTES:

- Technical amendments are reserved.
- CE – Conformity mark
- The manufacturer is then discharged from liability when damage is caused by improper use or installation.
- Clean luminaire regularly with solvent-free cleansers from dirt and deposits. Do not use high pressure cleaners.

- 1) -The screws on the luminaire are removed.
 -The mounting part is removed from the luminaire.
 -Holes are drilled on the mounting surface, corresponding to the holes of the mounting part, and dowels are driven into the holes.
 -The mounting part is screwed into the mounting surface.

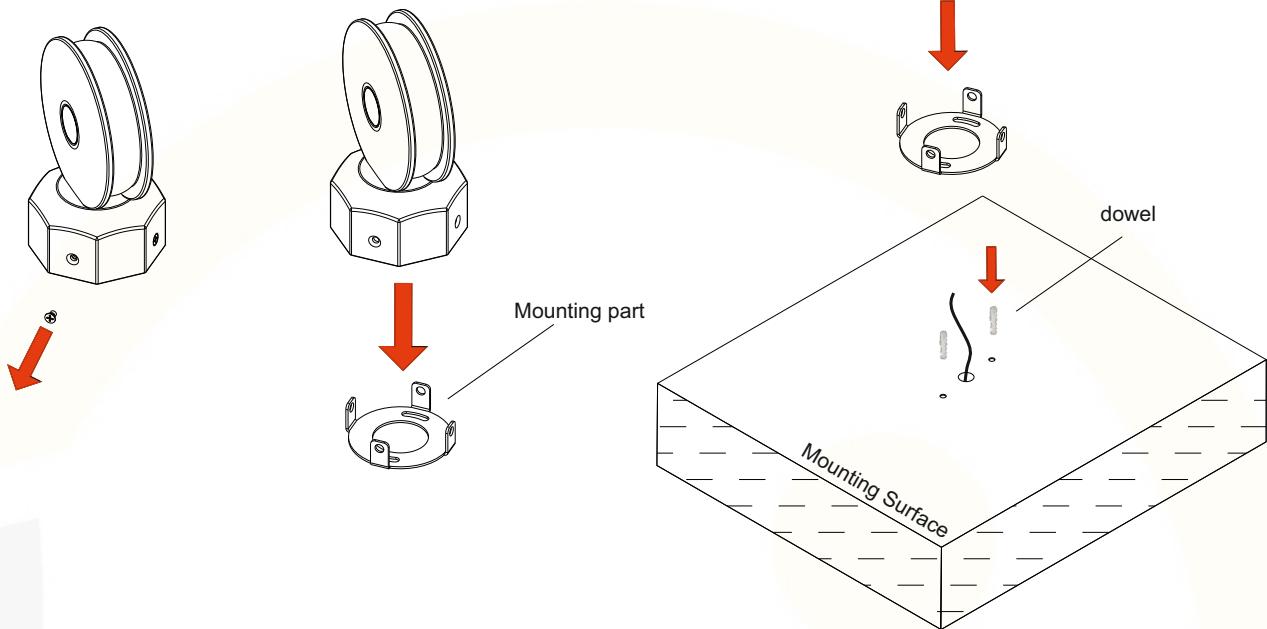

- 2) -Electrical connection is done and the luminaire is placed.
 -The luminaire is screwed back into the mounting part.

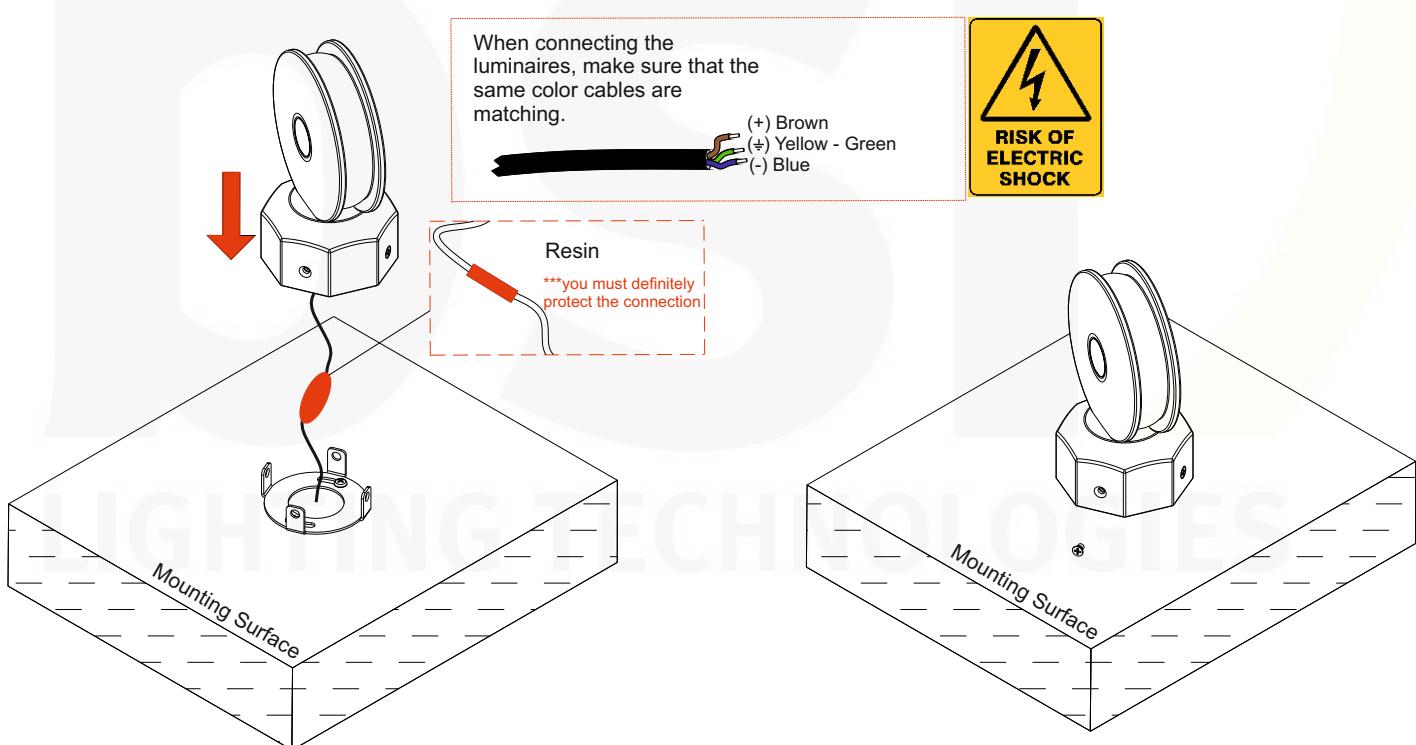

Warning:

- Do not cut-off or damage the cables of the products supplied as sockets. Otherwise, water may enter to the luminaire through cable and damage the electronic parts inside.
- If you make the electrical connection, except for IP.68 Terminal Block - IP.68 Plug connector - IP.68 socket; the connections must be under IP protection. Otherwise, water may enter to the luminaire through cable and damage the electronic parts inside.
- The IP68 Connecting kits must be assembled in accordance with the installation instructions. Otherwise, water may enter to the luminaire through cable and damage the electronic parts inside.

Out of Warranty Situations:

Product last output cable is not protected IP67-IP68.

Faulty electrical connection.

Wrong IP68 socket-terminal block- plug connector connection.
(Wrong opening of the cable length, faulty tightening the screws etc.)

If the IP68 Connecting kits are under water.

LIGHTING TECHNOLOGIES