

Bollards

Light column and bollard series with minimal and robust design in different heights, ideal for ambient illumination of squares, avenues, paths, parks, walkways and gardens. The lighting system offers discreet aesthetics during the day and an absolutely impressive effect at night providing harmonious hidden illumination and absolutely surprising light effects.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Smooth and Pure


Smooth, decorative bollard and light column with clear lines and opal diffusers provide high visual comfort and glare control. The modular luminaires, based on round shape aluminium profile and housing, offer various aesthetic and performance solutions.

For all its diversity and flexibility, iOdin RX with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

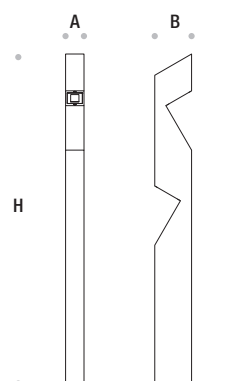


iOdin RX
iOdin RX




iOdin RX					
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)
LB79643	2 x 12W	3000K / 4000K	60	120	1000
LB79644	2 x 12W	3000K / 4000K	60	120	1500




For detailed information about the iOdin RX

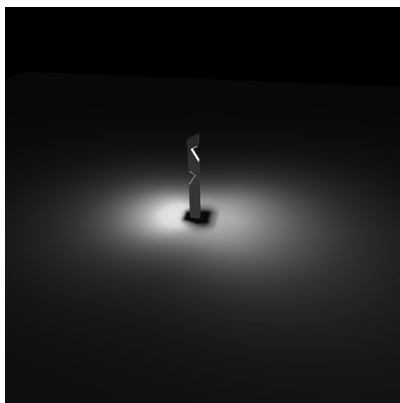


60 degree

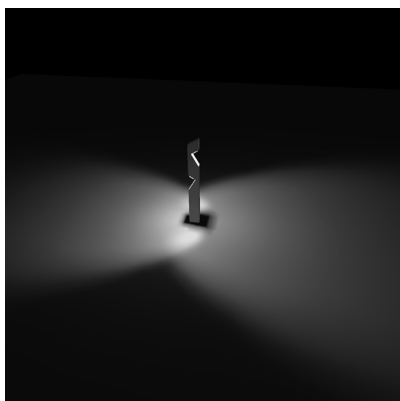

90 degree

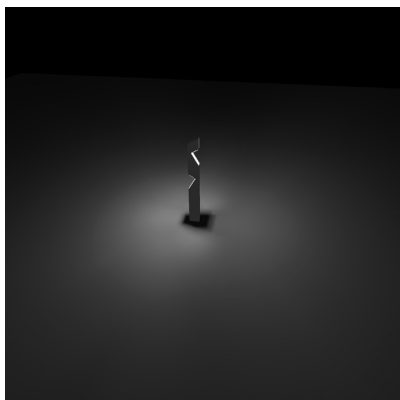

M3



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. BSIEN® LED Module.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems On-Off

Protection Class IP66

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.