



Test Report issued under the responsibility of:



TEST REPORT
IEC 60598-2-1
Luminaires
Part 2: Particular requirements
Section 1: Fixed general purpose luminaires

Report Number..... : PTC-223040002

Date of issue..... : 26.07.2023

Total number of pages : 49

Name of Testing Laboratory
preparing the Report : PTC Ürün Test ve Belgelendirme Sanayi Ticaret Ltd. Şti.
Örnek Mahallesi Udi Hasanbey Sokak Reis Plaza NO:31A
Ataşehir / İstanbul - Turkey

Applicant's name : BSI AYDINLATMA SAN. TIC. A.S.

Address..... : Baskent OSB, 20.Cad. B/3 No:4 Malikoy,Sincan,Ankara /
TURKEY

Test specification:

Standard : IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020

Test procedure : CB Scheme

Non-standard test method : N/A

TRF template used..... : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No. : IEC60598_2_1I

Test Report Form(s) Originator : Intertek Semko AB

Master TRF : Dated 2022-08-26

**Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical
Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved IECEE Testing
Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	SURFACE MOUNTED FIXED LUMINIAIRE	
Trade Mark(s)	BSI	
Manufacturer	BSI AYDINLATMA SAN. TIC. A.S. Baskent OSB, 20.Cad. B/3 No:4 Maliköy,Sincan,Ankara / TURKEY	
Model/Type reference.....	AR6072; AR6071; AR6073; AR6074; AR6075; AR6076; AR6077 AR6078; AR6079	
Ratings.....	24V == ; 36W; Class III; IP67	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
☒	CB Testing Laboratory:	PTC Ürün Test ve Belgelendirme Sanayi Ticaret Ltd. Şti.
Testing location/ address		Örnek Mahallesi Udi Hasanbey Sokak Reis Plaza NO:31A Ataşehir / İstanbul - Turkey
Tested by (name, function, signature)		Ertuğul GÜL Test Person 
Approved by (name, function, signature) ..		Emine Nur ÇİDEM Lab.Tech.Manager 
☐	Testing procedure: CTF Stage 1:	
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature) ..		
☐	Testing procedure: CTF Stage 2:	
Testing location/ address		
Tested by (name + signature).....		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
☐	Testing procedure: CTF Stage 3:	
☐	Testing procedure: CTF Stage 4:	
Testing location/ address		
Tested by (name, function, signature)		
Witnessed by (name, function, signature) . :		
Approved by (name, function, signature) .. :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):

Attachment 1: Additional requirements for LED module according to IEC 62031:2018 (3 pages)

Attachment 2: Assessment of blue light hazard to light sources and luminaires according to IEC TR 62778:2014 (page 42,43)

Attachment 3: Photo Documentation (6 pages)

Summary of testing: The products covered by this report have been tested and complies with the applicable requirements of this standard.

The test samples are complying with the relevant product standards and all applicable test IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020

Tests performed (name of test and test clause):

- ☒ Clause 3.5(3): Marking
☒ Clause 3.6(4): Construction
☐ Clause 3.7(11): Creepage distance and clearance
☐ Clause 3.8(7): Provision for earthing
☐ Clause 3.9(14): Screw terminals
☐ Clause 3.9(15): Screwless terminals
☒ Clause 3.10(5): External and internal wiring
☒ Clause 3.11(8): Protection against electric shock
☒ Clause 3.12(12): Endurance and thermal test
☒ Clause 3.13(9): Resistance to dust, solid objects and moisture
☒ Clause 3.14(10): Insulation resistance and electric strength
☒ Clause 3.15(13): Resistance to heat, fire and tracking

Testing location:

PTC Ürün Test ve Belgelendirme Sanayi Ticaret Ltd. Şti.
Örnek Mahallesi Udi Hasanbey Sokak Reis Plaza NO:31A
Ataşehir / İstanbul – Turkey

Subcontract testing location:

Eurofins Product Testing Service (Shanghai) Co., Ltd.
Building 18, No. 2168 Chenhang Highway, Minhang District,
Shanghai, China

Subcontract Test Clause:

Clause 2.7(4.24): Photobiological Hazards

Summary of compliance with National Differences (List of countries addressed):

N/A

☐ The product fulfils the requirements of _____ (insert standard number and edition and delete the text in parenthesis, leave it blank or delete the whole sentence, if not applicable)

Use of uncertainty of measurement for decisions on conformity (decision rule) :

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

☐ Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:


The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

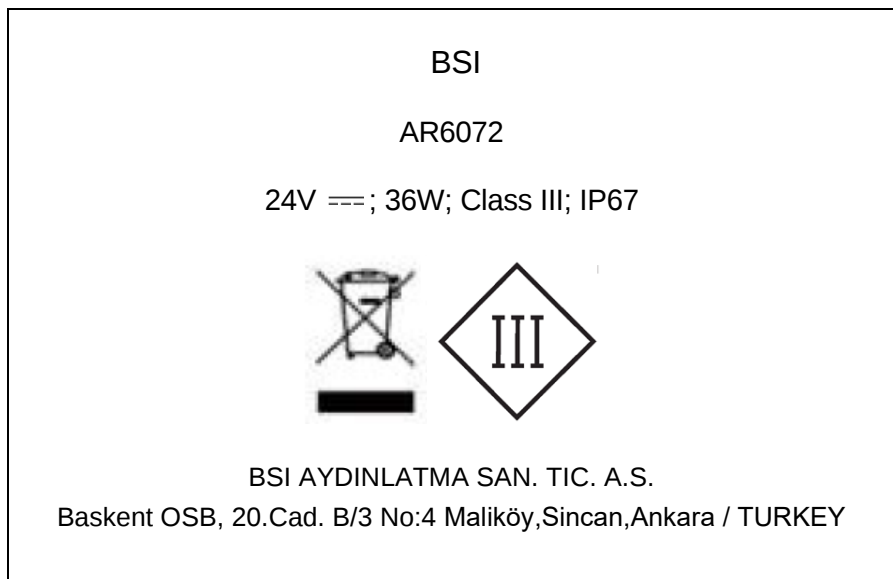**Remark:**

- 1.The marking for other models are the same except for the model.
- 2.The height of graphical symbols shall not be less than 5mm. The height of letters and numerals shall not be less than 2mm.
- 3.The symbol combination of WEEE logo shall have a minimum height of 7 mm.
- 4.The height of 'caution, risk of electric shock' symbol shall not be less than 15 mm.

Test item particulars : SURFACE MOUNTED FIXED LUMINIARE	
Classification of installation and use : Class III and Normal use	
Supply Connection : Supply Cable Type Y attachment	
Possible test case verdicts: - test case does not apply to the test object.....: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement.....: F (Fail)	
Testing :	
Date of receipt of test item : 31.03.2023	
Date (s) of performance of tests : 03.04.2023-20.04.2023	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a ☒ comma / ☐ point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided:	☐ Yes ☒ Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies) : BSI AYDINLATMA SAN. TIC. A.S. Baskent OSB, 20.Cad. B/3 No:4 Maliköy, Sincan, Ankara / TURKEY	
General product information and other remarks: The product is used for surface-mounted lighting via a mains-connected terminal with an LED module that cannot be replaced by the user. The AR6072, which is seen in the most difficult conditions, was selected for the test.	

Model Name	Rating	Power	Difference
AR6071	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	Products have the same structure and components except for power.
AR6072	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6073	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6074	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6075	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6076	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6077	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6078	24V === ; Class III ; IP67	10W 14W 16W 18W 36W	
AR6079	24V === ; Class III ; IP67	18W 26W 30W 36W	

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.4 (0)	GENERAL TEST REQUIREMENTS		P
1.4 (0.3)	More sections applicable..... :	Yes ☐ No ☒ Section/s:	—
1.4 (0.5)	Components	(see Annex 1)	—
1.4 (0.7)	Information for luminaire design in light sources standards		—
1.4 (0.7.2)	Light source safety standard	IEC 62031	—
	Luminaire design in the light source safety standard		P
1.5 (2)	CLASSIFICATION OF LUMINAIRES		P
1.5 (2.2)	Type of protection	Class III	P
1.5 (2.3)	Degree of protection..... :	IP67	—
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes ☒ No ☐	—
1.5 (2.5)	Luminaire for normal use	Yes ☒ No ☐	—
	Luminaire for rough service	Yes ☐ No ☒	—
1.6 (3)	MARKING		P
1.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
1.6 (3.3)	Additional information		P
	Language of instructions	English	P
1.6 (3.3.1)	Combination luminaires		N/A
1.6 (3.3.2)	Nominal frequency in Hz		N/A
1.6 (3.3.3)	Operating temperature		N/A
1.6 (3.3.5)	Wiring diagram		P
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors	Used indoors and outdoors.	N/A
1.6 (3.3.11)	Luminaires with remote control		N/A
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
1.6 (3.3.13)	Specifications of protective shields		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.14)	Symbol for nature of supply	===	P
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non-user replaceable LED module.	P
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
1.6 (3.4)	Test with water	15s	P
	Test with hexane	15s	P
	Legible after test		P
	Label attached		P

1.7 (4)	CONSTRUCTION		P
1.7 (4.2)	Components replaceable without difficulty		N/A
1.7 (4.3)	Wireways smooth and free from sharp edges		P
1.7 (4.4)	Lamp holders		N/A
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lamp holder has not moved from its position and show no permanent deformation		N/A
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		N/A
1.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
1.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
1.7 (4.7)	Terminals and supply connections		P
1.7 (4.7.1)	Contact to metal parts		P
1.7 (4.7.2)	Test 8 mm live conductor		P
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		N/A
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
1.7 (4.7.4)	Terminals other than supply connection		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
1.7 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
1.7 (4.9)	Insulating lining and sleeves		P
1.7 (4.9.1)	Retainment		P
	Method of fixing :	Appropriate length is used.	P
1.7 (4.9.2)	Insulated linings and sleeves:		P
	Resistant to a temperature > 20 °C to the wire temperature or		P
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)..... :		N/A
1.7 (4.10)	Double or reinforced insulation		N/A
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
1.7 (4.11)	Electrical connections and current-carrying parts		P
1.7 (4.11.1)	Contact pressure		P
1.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
1.7 (4.12)	Screws and connections (mechanical) and glands		P
1.7 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
1.7 (4.12.4)	Locked connections:		P
	- fixed arms; torque (Nm) :	2,5	P
	- lamp holder; torque (Nm) :		N/A
	- push-button switches; torque 0,8 Nm :		N/A
1.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A
1.7 (4.13)	Mechanical strength		P
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm) :	Diffuser Enclosure: 0.2J	P
	- other parts; energy (Nm)..... :	Metal Enclosure: 0.35J	P
	1) live parts		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	2) linings		N/A
	3) protection		P
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		P
1.7 (4.13.3)	Straight test finger		P
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
1.7 (4.14)	Suspensions, fixings and means of adjusting		P
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight	4x0,32=1,28kg	P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
1.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A
1.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C :	See Test Table 1.15 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
1.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear :	(compliance with Section 12)	P
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
1.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
1.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
1.7 (4.18)	Resistance to corrosion		P
1.7 (4.18.1)	- rust-resistance		P
1.7 (4.18.2)	- season cracking in copper		N/A
1.7 (4.18.3)	- corrosion of aluminium		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.19)	Igniters compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
1.7 (4.21)	Protective shield		N/A
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment :	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A
1.7 (4.24)	Photobiological hazards		P
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)	EFSH23051302-IE-01-L01	P
1.7 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778	RG0	—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 .. :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
1.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
1.7 (4.26)	Short-circuit protection		N/A
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
1.7 (4.27)	Terminal blocks with integrated screwless protective earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
1.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ($^{\circ}\text{C}$) :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
1.7 (4.29)	Luminaires with non-replaceable light source		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
1.7 (4.30)	Luminaires with non-user replaceable light source		P
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		N/A
	At least one fixing means requiring use of tool		P
1.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
1.7 (4.31.1)	SELV or PELV circuits		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Used SELV/PELV source		P
	Voltage $\leq$ ELV		P
	Insulating of SELV/PELV circuits from LV supply		P
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		P
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
1.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
1.7 (4.33)	Luminaire powered via information technology communication cabling		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
1.7 (4.34)	Electromagnetic fields (EMF)		P
	No harmful electromagnetic fields		P
1.7 (4.35)	Protection against moving fan blades		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius ≥ 0.5 mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan ≤ 2 W at rated voltage		N/A
1.7 (4.36)	Track-mounted luminaires		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A
1.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		N/A
1.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II ☐ Category III ☐	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
1.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.8 (11.2) I	N/A
	Creepage distances for frequency over 30 kHz:		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Controlgear marked with $\hat{U}_{OUT}$ and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 1.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.8 (11.2) II	N/A
1.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.8 (11.2) I	N/A
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with U_P	See Test Table 1.8 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.8 (11.2) II	N/A

1.9 (7)	PROVISION FOR EARTHING		N/A
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance < 0,5 Ω :		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		N/A
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		N/A
1.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		N/A
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		N/A
1.9 (7.2.8)	Material of protective earth terminal		N/A
	Contact surface bare metal		N/A
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Length of protective earthing conductor		N/A
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

1.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

1.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		N/A
	Separately approved; component list..... :	(see Annex 1)	N/A
	Part of the luminaire :	(see Annex 4)	N/A

1.11 (5)	EXTERNAL AND INTERNAL WIRING		P
1.11 (5.2)	Supply connection and external wiring		P
1.11 (5.2.1)	Means of connection		N/A
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits ≤ 25 V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable		N/A
	Nominal cross-sectional area (mm ²)		N/A
	Cables equal to IEC 60227 or IEC 60245		N/A
1.11 (5.2.3)	Type of attachment, X, Y or Z		N/A
1.11 (5.2.5)	Type Z not connected to screws		N/A
1.11 (5.2.6)	Cable entries:		N/A
	- suitable for introduction		N/A
	- adequate degree of protection		N/A
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.10)	Cord anchorage:		N/A
	- covering protected from abrasion		N/A
	- clear how to be effective		N/A
	- no mechanical or thermal stress		N/A
	- no tying of cables into knots etc.		N/A
	- insulating material or lining		N/A
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		N/A
1.11 (5.2.10.3)	Tests:		N/A
	- impossible to push cable; unsafe		N/A
	- pull test: 25 times; pull (N) :		N/A
	- torque test: torque (Nm) :		N/A
	- displacement ≤ 2 mm		N/A
	- no movement of conductors		N/A
	- no damage of cable or cord		N/A
	- function independent of electrical connection		N/A
1.11 (5.2.10.4)	Luminaire with/designed for use with supply cord with maximum current of 2A:		P
	- Ordinary Class III luminaire supplied with SELV ≤ 25 V RMS/60V DC	24V DC	P
	- Ordinary Class III luminaire supplied with PELV ≤ 12 V RMS/30V DC		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Other than ordinary Class III luminaire supplied with voltage $\leq 12V$ RMS/30V DC		N/A
	Pull test of 30N		P
1.11 (5.2.11)	External wiring passing into luminaire		N/A
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		N/A
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
1.11 (5.3)	Internal wiring		P
1.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		P
	- not delivered/ mounting instruction		N/A
	- factory assembled		P
	- socket outlet loaded (A)		N/A
	- temperatures : (see Annex 2)		P
	Green-yellow for protective earth only		N/A
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm ²)..... : 0,75		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulation thickness (mm) :	0,7	P
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Cross-sectional area (mm ²)..... :		N/A
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		P
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
1.11 (5.3.4)	Joints and junctions effectively insulated		N/A
1.11 (5.3.5)	Strain on internal wiring		N/A
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
1.11 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A
1.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
1.12 (8.2.1)	Live parts not accessible		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible		N/A
	- required insulation from live parts in compliance with Table X.1		N/A
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V)..... :		N/A
	- interrupted DC voltage (V) :		N/A
	- touch current if applicable (mA) :		N/A
	One conductive part insulated if required		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	- interrupted DC voltage (V)		N/A
	Class III luminaire only for connection to SELV/PELV		N/A
			N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V)..... :		N/A
	- voltage under load/ no-load DC (V).....:		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.12 (8.2.6)	Covers reliably secured		P
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 μ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A
1.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		—
1.13 (12.2)	Selection of lamps and ballasts		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied	(Control gear used see Annex 2)	—
1.13 (12.3)	Endurance test		P
	a) mounting-position	Normal Position	—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	b) test temperature (°C)	35	—
	c) total duration (h)	240	—
	d) supply voltage (V)	26,4	—
	d) if not equipped with control gear, constant voltage/current (V) or (A)		—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
1.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
1.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	N/A
1.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—
	- thermal link		N/A
	- manual reset cut-out		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C) :		N/A
	- track-mounted luminaires		N/A
1.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W :		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions :		—
	- Ballast failure at supply voltage (V) :		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—
	- calculated temperature of fixing point/exposed part (°C) :		—
	Ball-pressure test :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—
	- calculated temperature of fixing point/exposed part (°C) :		—
	Ball-pressure test :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions :		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link..... :	Yes ☐ No ☐	—
	- manual reset cut-out :	Yes ☐ No ☐	—
	- auto reset cut-out :	Yes ☐ No ☐	—
	- case of abnormal conditions :		—
	- highest measured temperature of fixing point/ exposed part (°C): :		—
	Ball-pressure test: :	See Test Table 1.15 (13.2.1)	N/A

1.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		N/A
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP..... :	IP67	—
	- mounting position during test :	Normal Position	—
	- fixing screws tightened; torque (Nm) :		—
	- tests according to clauses..... :		—
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		P
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		P
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.14 (9.3)	Humidity test 48 h	25°C,93%RH	P
1.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ):		P
	SELV/PELV:		P
	- between current-carrying parts of different polarity :		P
	- between current-carrying parts and mounting surface..... :	999,9MΩ for LED module	P
	- between current-carrying parts and metal parts of the luminaire	999,9MΩ for LED module	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV/PELV:		N/A
	- between live parts of different polarity		N/A
	- between live parts and mounting surface		N/A
	- between live parts and metal parts		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		P
	SELV/PELV:		P
	- between current-carrying parts of different polarity :		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- between current-carrying parts and mounting surface..... :	500V	P
	- between current-carrying parts and metal parts of the luminaire :	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
	Other than SELV/PELV:		N/A
	- between live parts of different polarity :		N/A
	- between live parts and mounting surface :		N/A
	- between live parts and metal parts :		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 :		N/A
1.15 (10.3)	Touch current (mA)..... :	Class III	N/A
	Protective conductor current (mA)..... :		N/A

1.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
1.16 (13.2.1)	Ball-pressure test :	See Test Table 1.16 (13.2.1)	P
1.16 (13.3.1)	Needle-flame test (10 s) :	See Test Table 1.16 (13.3.1)	N/A
1.16 (13.3.2)	Glow-wire test (650°C) :	See Test Table 1.16 (13.3.2)	P
1.16 (13.4)	Proof tracking test (IEC 60112) :	See Test Table 1.16 (13.4)	N/A

IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
1.8 (11.2)	TABLE I: Creepage distances and clearances						N/A
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages						N/A
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*						N/A
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
PTI					< 600 ☒ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
PTI					< 600 ☐ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
PTI					< 600 ☐ ≥ 600 ☐		—
Pulse voltage or U_P if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
1.8 (11.2)	TABLE II: Creepage distances and clearances						N/A
Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							
Distance 2:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							
Distance 3:							
Working voltage (V)							—
Frequency if applicable (kHz)							—
PTI					< 600 ☐ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV)							—
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics		P
Allowed impression diameter (mm)		2	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)
Diffuser	See Annex 1	75	0.9
Side Cover	See Annex 1	75	0.5
Supplementary information:			

1.16 (13.3.1)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

1.16 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests				P
Object/ Part No./ Material	Manufacturer/ trademark	GWT (°C) : 650			Verdict
		t_E (s)	t_I (s)	t_R (s)	
Diffuser	See Annex 1	0	0	0	P
Side Cover	See Annex 1	0	0	0	P
Ignition of the specified layer placed underneath the test specimen (Yes/No)..... :					
Supplementary information:					

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.16 (13.4)	TABLE: Proof tracking test					N/A
Test voltage PTI :			175 V			—
Object/ Part No./ Material		Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:						

ANNEX 1	TABLE: Critical components information						P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
CONNECTOR	B	TECHNO SRL	TH391	450 V; T85 °C; IP68;	EN 60998-1:2004 EN 60998-2-1:2004 EN 60998-2-3:2004	ENEC / CA02.05249	
CABLE	B	PAMUKKALE KABLO SANAYİ VE TİC. A.Ş.	H05VV-F	300/500V; 2x0,75mm ²	EN 50525-2-11:2011	TSE / 001025-HAR-0401	
LED MODULE	C	BSI	MSM-003 V-1.Q	24V; 1.5A; 36W	IEC 62031:2018	Tested with appliance.	
PLASTIC ENCLOSURE	C	BSI	-	PC; 1.5mm	IEC 60598-1:2020	Tested with appliance.	
METAL ENCLOSURE	C	BSI	-	Aluminium; 1.3mm	IEC 60598-1:2020	Tested with appliance.	

Supplementary information:

¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

²⁾ License available upon request.

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Thermal tests of Section 12			P			
	Type reference	AR6072	—				
	Lamp used.....	LED	—				
	Lamp control gear used	-	—				
	Mounting position of luminaire	Normal Position	—				
	Supply wattage (W)	36	—				
	Supply current (A)	-	—				
	Temperatures in test 1 - 4 below are corrected for ta (°C)	25	—				
	- abnormal operating mode	-	—				
1.13 (12.4)	- test 1: rated voltage	-	—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 times rated voltage	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	-	—				
	Through wiring or looping-in wiring loaded by a current of A during the test	-	—				
1.13 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage	-	—				
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Connector	23,5	-	23,9	-	85	-	-
Supply Cable	23,5	-	33,1	-	90	-	-
LED	23,5	-	39	-	Ref.	-	-
PCB	23,5	-	35,1	-	Ref.	-	-
Diffuser	23,5	-	28,9	-	90	-	-
Body	23,5	-	33,7	-	90	-	-
Side Cover	23,5	-	31,5	-	90	-	-
Connection Connector	23,5	-	24,7	-	85	-	-
Supplementary information:							

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)		N/A
	Torque (Nm)		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A

IEC 60598-2-1										
Clause	Requirement + Test					Result - Remark				Verdict
(15.6.1)	Conductors									N/A
	Terminal size and rating									N/A
15.6.2	Mechanical tests									N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) :									N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) :									N/A
(15.6.3)	Electrical tests									N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1									N/A
(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests									N/A
	Voltage drop (mV) after 1 h									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop of two inseparable joints									
	Voltage drop after 10th alt. 25th cycle									
	Max. allowed voltage drop (mV) :									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop after 50th alt. 100th cycle									
	Max. allowed voltage drop (mV) :									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 10th alt. 25th cycle									
	Max. allowed voltage drop (mV) :									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 50th alt. 100th cycle									
	Max. allowed voltage drop (mV) :									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
Supplementary information:										

IEC 62031:2018			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.2	Classification		
	Built-in module : Yes ☐ No ☒		—
	Independent module..... : Yes ☐ No ☒		—
	Integral module : Yes ☒ No ☐		—
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A
6	MARKING		N/A
7	TERMINALS		N/A
8 (9)	EARTHING		N/A
9 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		P
	See report of IEC 60598-2-1 part		P
10 (11)	MOISTURE RESISTANCE AND INSULATION		P
	See report of IEC 60598-2-1 part		P
11 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		N/A
	Basic insulation, $2U + 1000$ V		N/A
	Supplementary insulation, $2U + 1000$ V		N/A
	Double or reinforced insulation, $4U + 2000$ V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

IEC 62031:2018			
Clause	Requirement + Test	Result - Remark	Verdict
12 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	P
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	P
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1 \text{ M}\Omega$	999,9 $\text{M}\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		—
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
14 (15)	CONSTRUCTION		P
	See report of IEC 60598-2-1 part		P

IEC 62031:2018			
Clause	Requirement + Test	Result - Remark	Verdict
15 (16)	CREEPAGE DISTANCES AND CLEARANCES		N/A
16 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
	See report of IEC 60598-2-1 part		P
17 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
	See report of IEC 60598-2-1 part		P
18	RESISTANCE TO CORROSION		N/A
20	HEAT MANAGEMENT		N/A
22	PHOTOBIOLOGICAL SAFETY		P
	See report of IEC 60598-2-1 part		P
A	ANNEX A - TESTS		N/A
12 (14)	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
PCB	Overpower condition; MSM-003 V-1.Q		NO
LED	Short-circuit; MSM-003 V-1.Q		NO
(A)	ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		N/A
ANNEX 1	LED MODULES WITH INTEGRAL CONTROLGEAR PROVIDING SELV		N/A

IEC TR 62778:2014			
Clause	Requirement + Test		Verdict
	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		N/A
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as : ☐ RG0 unlimited ☐ RG1 unlimited		N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	- ..Risk Group 0 unlimited		P
	- ..Risk Group 1 unlimited		N/A
	- E_{thr} (lx) : Distance to reach RG1 (m) :	See below table	N/A
	TABLE: Spectroradiometric measurement		P
	Measurement performed on:	☐ LED package ☐ LED module ☐ Lamp ☒ Luminaire ☐ LED	
	Model number	AR6072	
	Test voltage (V)	24VDC	—
	Test current (mA)	130	—

IEC 62778:2014			
Clause	Requirement + Test	Result - Remark	Verdict

	Test frequency (Hz)..... :			N/A	—
	Ambient, t (°C) :			25°C	—
	Measurement distance..... :			☒ 20 cm ☐ ... cm	—
	Source size :			☒ Non-small ☐ Small : mm	—
	Field of view :			☐ 100 mrad ☒ 11 mrad ☐ 1,7 mrad (for small sources)	—
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	N/A	
x/y colour coordinates				N/A	
Blue light hazard radiance		L _B	W/(m²•sr¹)	3,343E+00	RG0
Blue light hazard irradiance		E _B	W/m²	N/A	
Luminance		L	cd/m²	8,056E+03	
Illuminance		E	lx	N/A	
Risk group achieved:					--
RG 0	- ..Risk Group 0 unlimited				--
	- ..Risk Group 1 unlimited				--
	- E _{thr}(lx): Distance to reach RG1.....(m):				--
Supplementary information:					

PHOTO 1.
Overall View

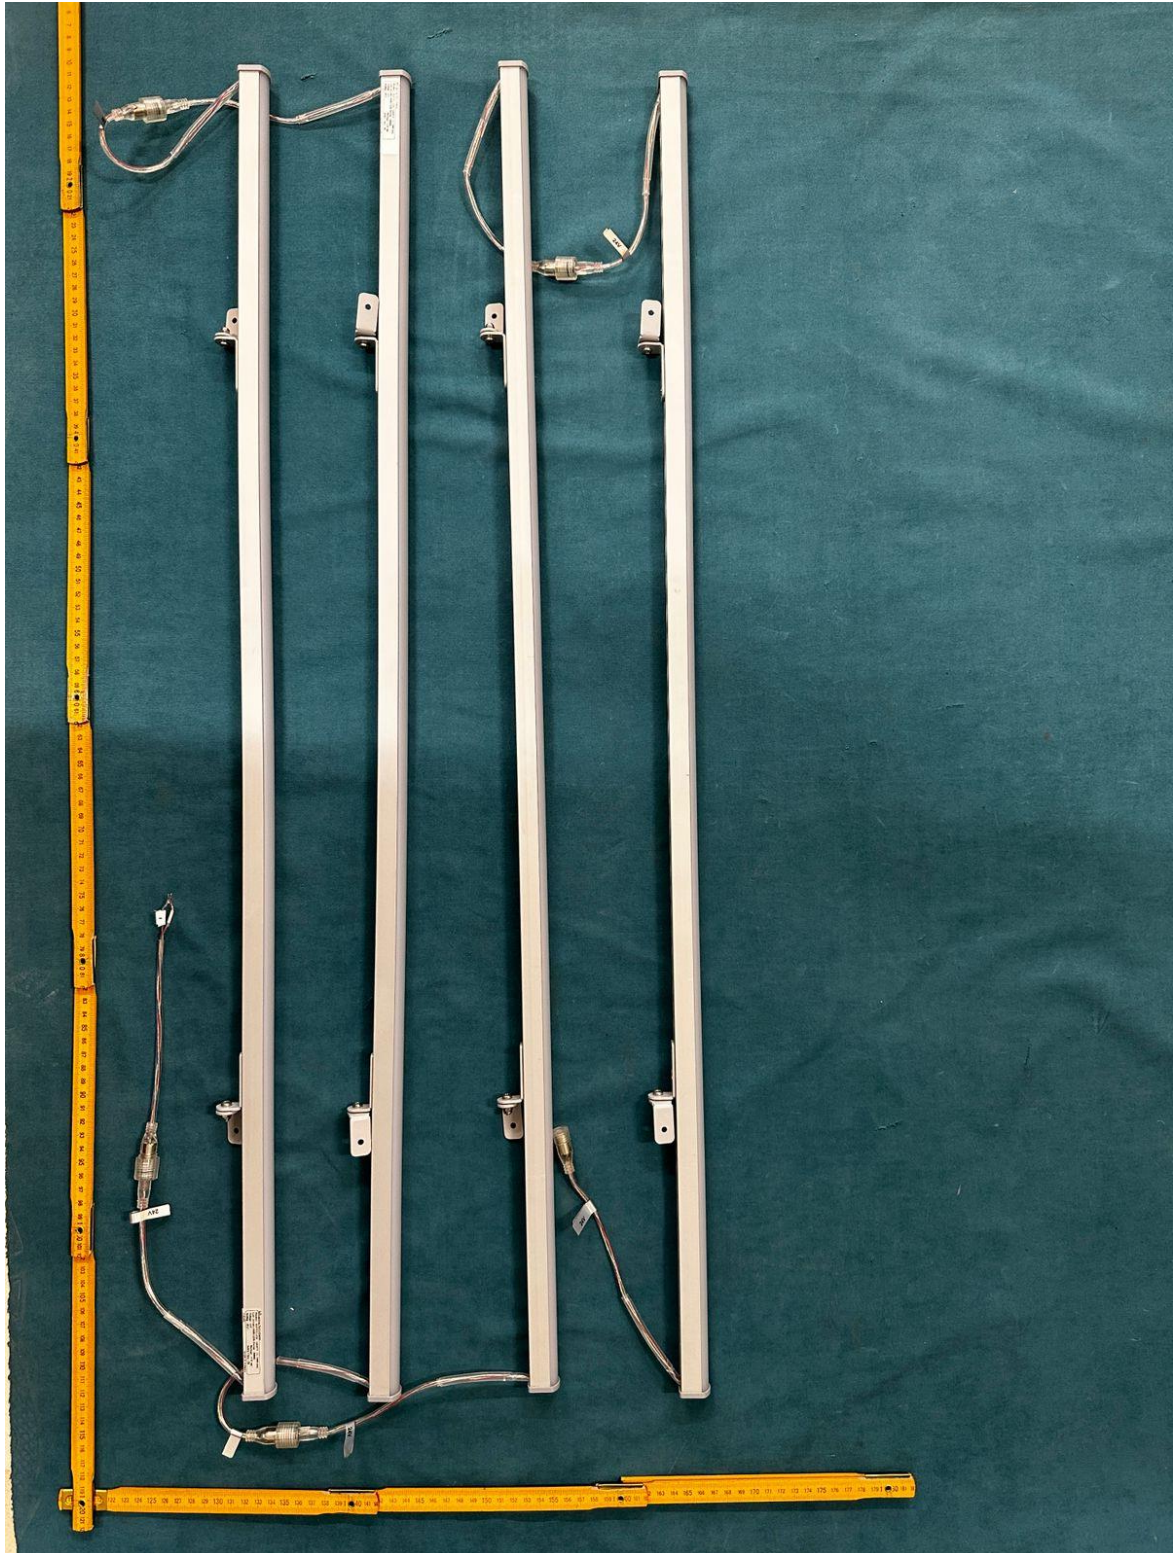


PHOTO 2.
Overall View

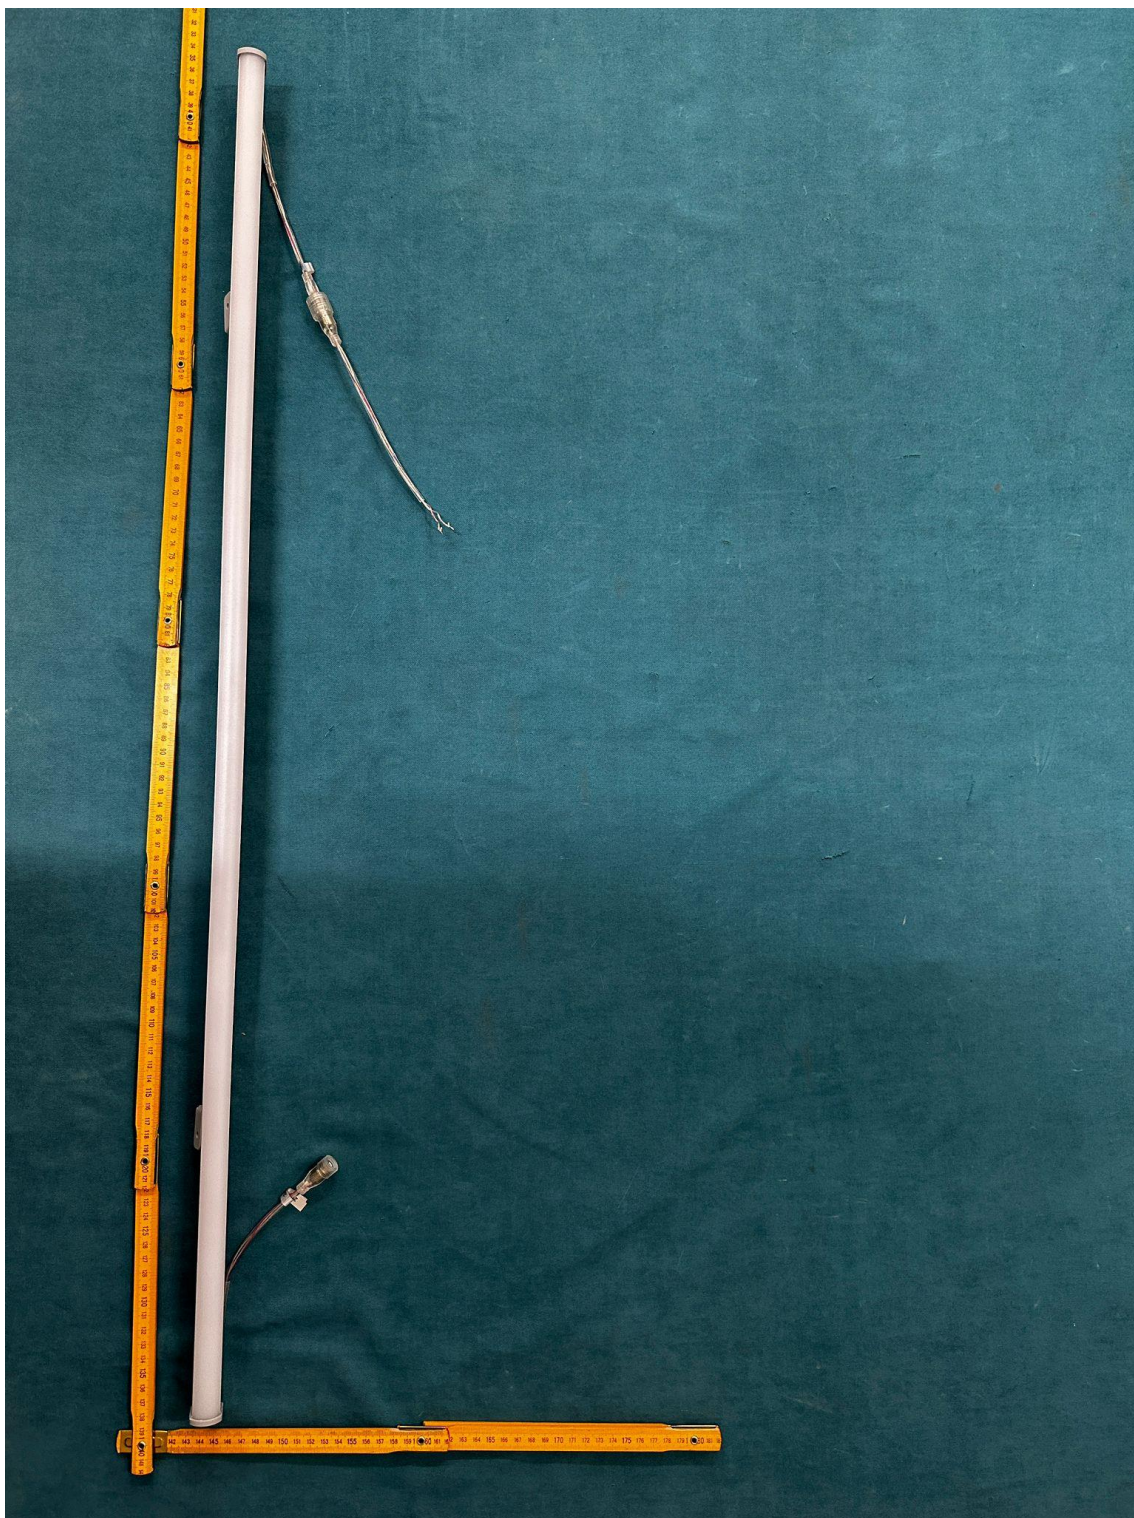


PHOTO 3.
Overall View



PHOTO 4.
LED Module



PHOTO 5.
LED Silicone Protection



PHOTO 6.
Input Connector

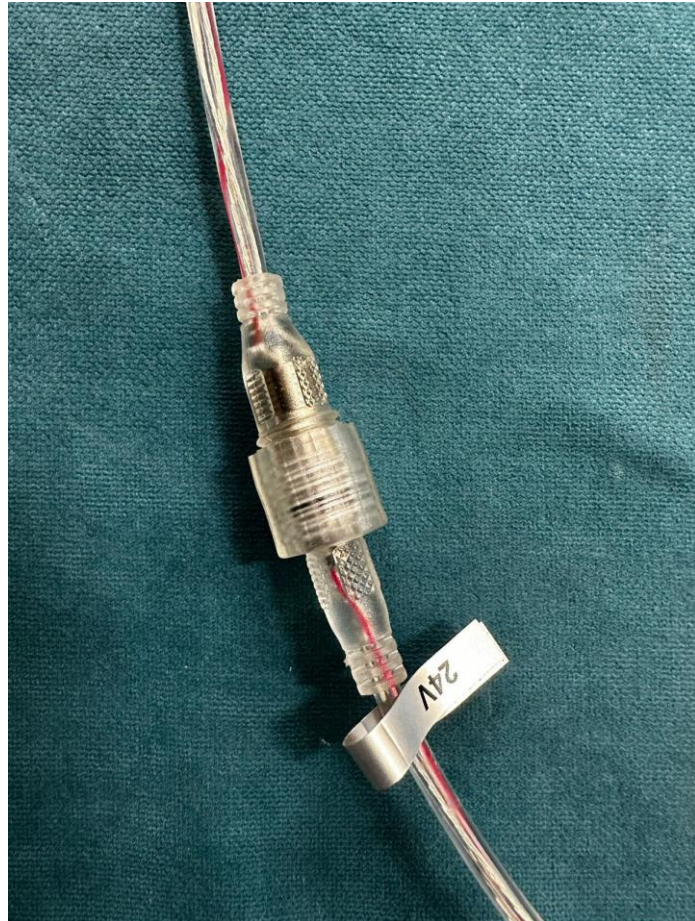


PHOTO 7.
Input Cable

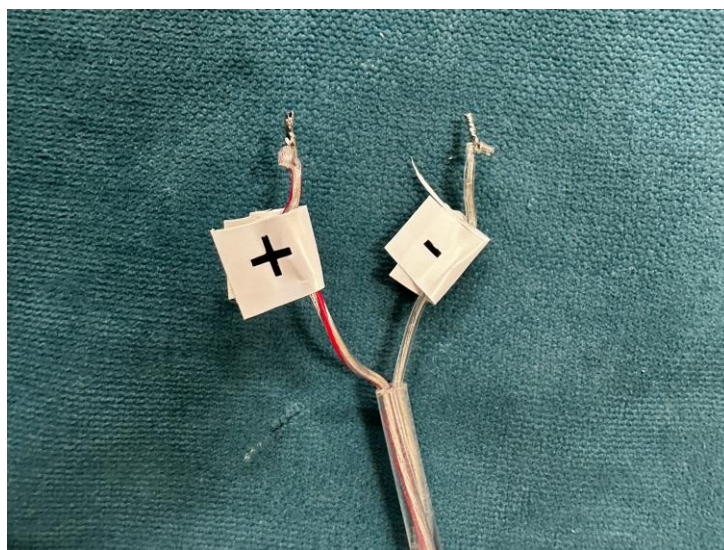


PHOTO 7.
Connection Connector



PHOTO 8.
Input Connection

