

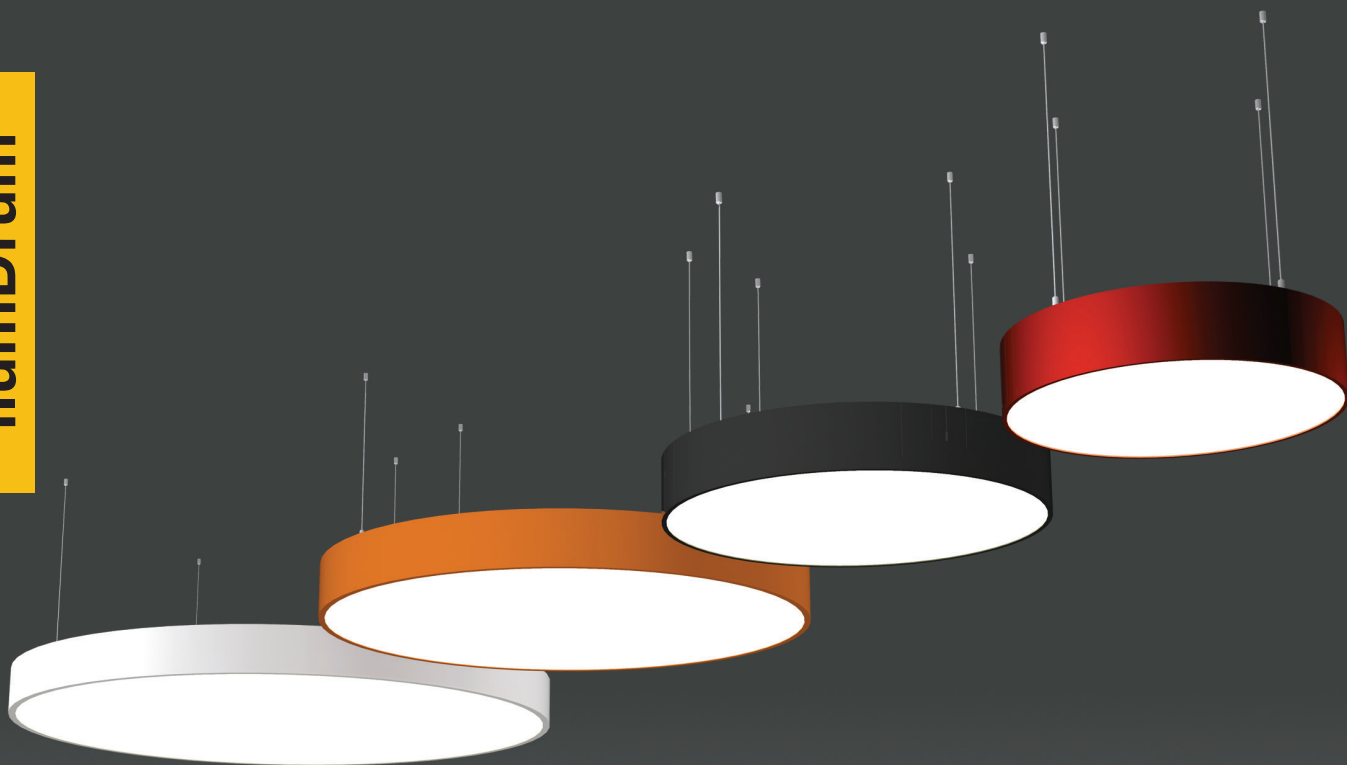
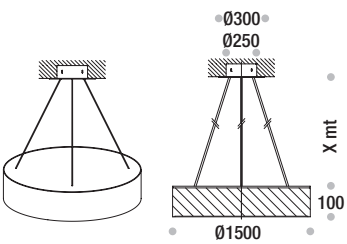
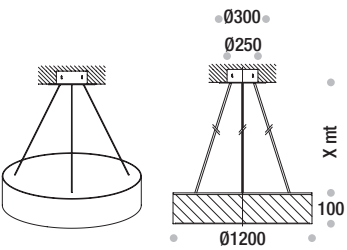
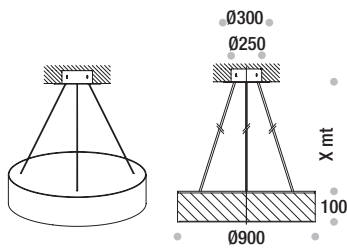
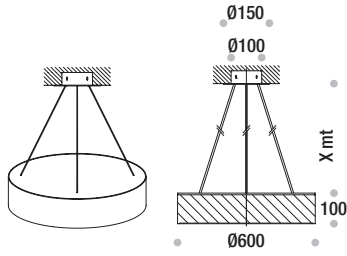


ilumDrum

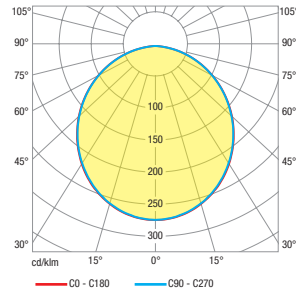

Provide high light output, low-energy and long-life with an attractive design.

Round LED luminaire delivers well-balanced light output and ideal for specification across a variety of commercial and institutional spaces including open offices, classrooms, themed areas, retail spaces and healthcare facilities.

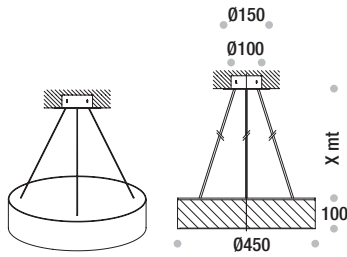

CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm)	COLOUR TEMPERATURE
ilumDrum SURFACE	35W	3675	3000K
		3885	4000K
ilumDrum SURFACE	48W	5040	3000K
		5328	4000K
ilumDrum SURFACE	109W	11445	3000K
		12099	4000K
ilumDrum SURFACE	150W	15750	3000K
		16650	4000K
ilumDrum SURFACE	180W	18900	3000K
		19980	4000K
ilumDrum SUSPENDED	35W	3675	3000K
		3885	4000K
ilumDrum SUSPENDED	48W	5040	3000K
		5328	4000K
ilumDrum SUSPENDED	109W	11445	3000K
		12099	4000K
ilumDrum SUSPENDED	150W	15750	3000K
		16650	4000K
ilumDrum SUSPENDED	180W	18900	3000K
		19980	4000K

LED Type	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. Up to 126 lm/W. Tunable white technology 2.700K - 6.500K optional.
Nominal Voltage	220V-240V AC, 50/60Hz
Color Rendering Index	CRI > 80
Optics	High efficiency LED technology for maximum efficiency eliminating shadows with exceptional colour rendering and homogeneously illuminated.
Materials	Polyester powder coated paint finish aluminium profile housing with chemical chromatised protection.
Finishing	Anodized Mat, RAL9005, RAL9010.
LED Specification	L80B10 > 60.000 hours life time. Calculation for LED fixtures are based on measurements that comply with LM-80.
Energy Efficiency Class (EEC)	A++
Ambient Temperature	-20 °C to +45 °C
Control Systems	1-10V DIM, Switch Dim, DALI Interface. Bluetooth Wireless with Casambi technology.
Protection Class	IP40
Insulation Class	Class I
Options	Emergency lighting kit system.
Installation	Surface mounted. Suspended.
Conformity	Complies with European Standards EN 60598 and CE certified.