

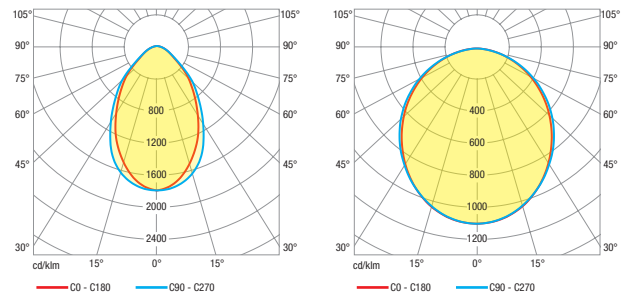


illumGrid

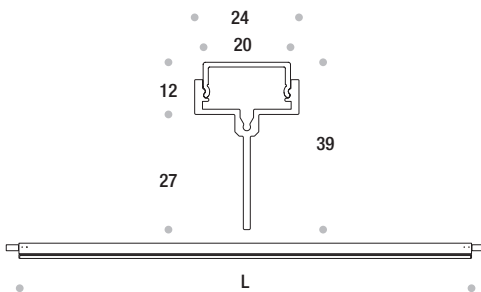

Details make the difference.

Slim, elegant and timeless recessed linear luminaire integrated to ceilings with its high visual comfort, glare control and maximum efficiency. The form matches with the modern architecture, following the latest interior design trends.

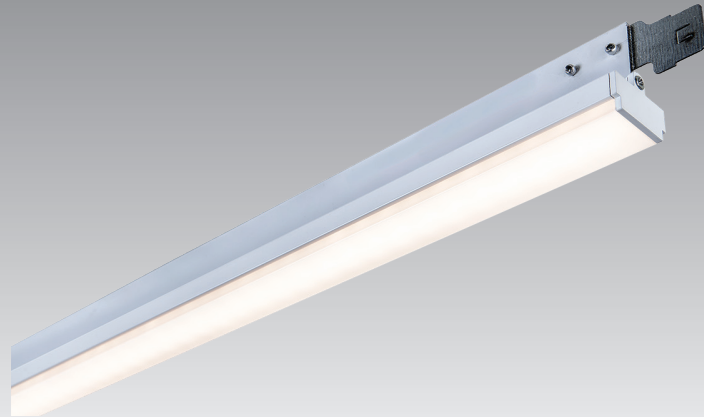

CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm)	COLOUR TEMPERATURE	LENGTH (mm)
ilumGrid	13W	1365	3000K	575
		1443	4000K	575
ilumGrid	26W	2730	3000K	1175
		2886	4000K	1175

LED Type	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. Up to 126 lm/W. Tunable white technology 2.700K - 6.500K optional.
Nominal Voltage	220V-240V AC, 50/60Hz
Color Rendering Index	CRI > 80
Optics	Opal diffused beam for high uniform light distribution. Microprismatic (UGR < 19)
Materials	Polyester powder coated paint finish extruded aluminium housing. Halogen-free cable.
Finishing	Anodized Mat, RAL9005, RAL9010.
LED Specification	L80B10 > 60.000 hours life time. Calculation for LED fixtures are based on measurements that comply with LM-80.
Energy Efficiency Class (EEC)	A++
Ambient Temperature	-20 °C to +45 °C
Control Systems	1-10V DIM, Switch Dim, DALI Interface. Bluetooth Wireless with Casambi technology.
Protection Class	IP40
Insulation Class	Class I
Options	Emergency lighting kit system.
Installation	Recessed.
Conformity	Complies with European Standards EN 60598 and CE certified.