



ilumThin

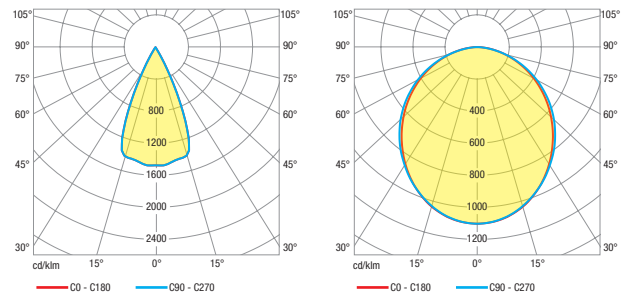

### The smart lighting solution.

Compact size linear luminaire perfectly integrated into modern and contemporary indoor spaces provides glare free illumination and high visual comfort with diffused beam or wallwash with individual optical modules. Ensures continuous, seamless lines of light combined with highest efficacy standards.

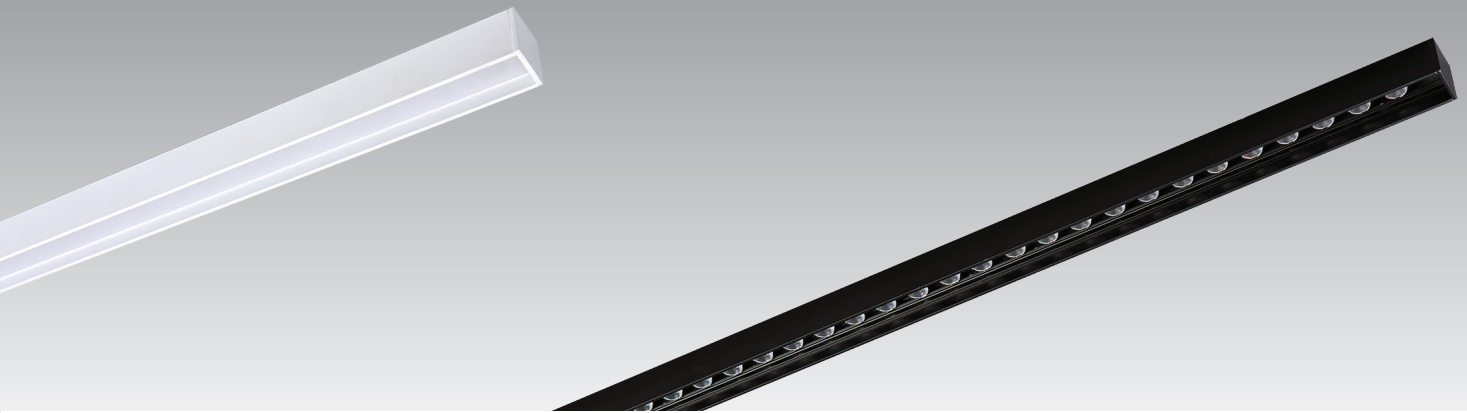

CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm)	COLOUR TEMPERATURE
ilumThin	14W	1470	3000K
		1554	4000K
ilumThin PW	36W	3780	3000K
		3996	4000K

<b>LED Type</b>	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. Up to 126 lm/W. Tunable white technology 2.700K - 6.500K optional.
<b>Nominal Voltage</b>	220V-240V AC, 50/60Hz
<b>Color Rendering Index</b>	CRI > 80
<b>Optics</b>	Opal diffused beam for high uniform light distribution. Microprismatic (UGR < 19) Wallwash, Narrow, Wide and Oval Beam
<b>Materials</b>	Polyester powder coated paint finish extruded aluminium housing. Halogen-free cable.
<b>Finishing</b>	Anodized Mat, RAL9005, RAL9010.
<b>LED Specification</b>	L80B10 > 60.000 hours life time. Calculation for LED fixtures are based on measurements that comply with LM-80.
<b>Energy Efficiency Class (EEC)</b>	A++
<b>Ambient Temperature</b>	-20 °C to +45 °C
<b>Control Systems</b>	1-10V DIM, Switch Dim, DALI Interface. Bluetooth Wireless with Casambi technology.
<b>Protection Class</b>	IP40
<b>Insulation Class</b>	Class I
<b>Options</b>	Emergency lighting kit system.
<b>Installation</b>	Surface mounted. Suspended.
<b>Conformity</b>	Complies with European Standards EN 60598 and CE certified.