



# iMetis

iMetis pole, catenary and wall variants with high efficiency LED technology provide maximum flexibility for road and residential street applications. The modern shaped street lighting luminaire is classically inspired. Both its appearance and the materials used in its manufacture are intended to last.

Designed to last in extremely harsh environments.


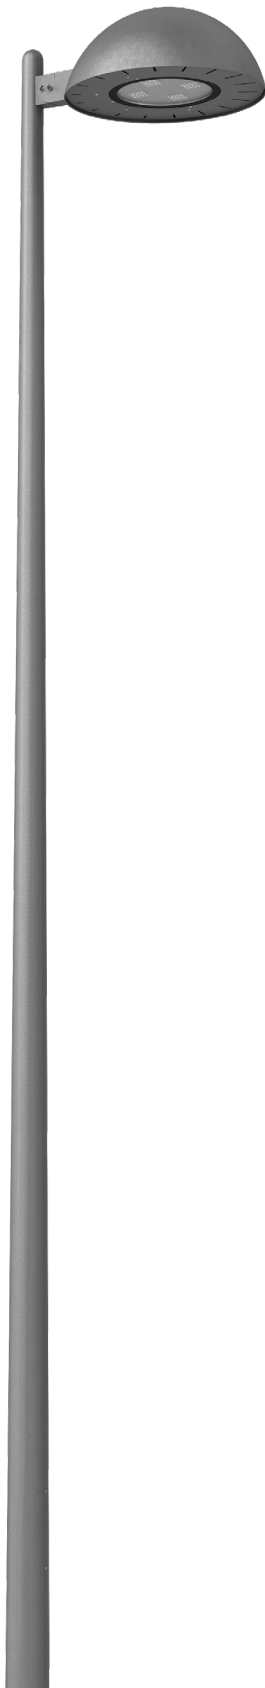




CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm) 3000K / 4000K	COLOUR TEMPERATURE	A (mm)	B (mm)	H (mm)
UA1133 ST	72W	7920 / 8640	3000K / 4000K	450	190	4000 / 5000
UA1135 ST	120W	13200 / 14400	3000K / 4000K	550	240	4000 / 5000
UA1137 CATENARY	72W	7920 / 8640	3000K / 4000K	450	190	-
WA1139 WALL	72W	7920 / 8640	3000K / 4000K	450	190	-

\*Poles to be ordered separately. See tables on pages 386-391

<b>LED Type</b>	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant.
<b>Nominal Voltage</b>	220V-240V AC, 50/60Hz
<b>Color Rendering Index</b>	CRI> 80 standard and CRI>90 on request.
<b>Optics</b>	Rotationally symmetrical 30° / 60° / 90° or asymmetrical M3 street optics.
<b>Materials</b>	Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of aluminium with polyester powder coating.
<b>Optional Coating</b>	Marine grade.
<b>Diffuser</b>	Thermal-shock resistant tempered glass.
<b>LED Specification</b>	L90B50 > 100000 hours life time.
<b>Energy Efficiency Class (EEC)</b>	A++
<b>Operating Temperature</b>	-40°C / +55°C
<b>Power Factor</b>	>0.95
<b>Control Systems</b>	DALI Interface.
<b>Protection Class</b>	IP66
<b>Impact Resistance</b>	IK09
<b>Insulation Class</b>	Class I
<b>Conformity</b>	Complies with European Standards EN 60598 and CE certified.

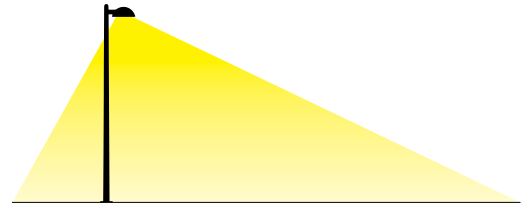

iMetis Wall WA1139

