


iPace Area



Durable, versatile and efficient LED luminaires for outdoor area lighting with wide range of lighting distributions. Cost-effective and efficiency to maximise energy and maintenance savings. Ideal for urban roads and streets, highways, large areas, car parks, roundabouts and sports fields.

Designed to last in extremely harsh environments.

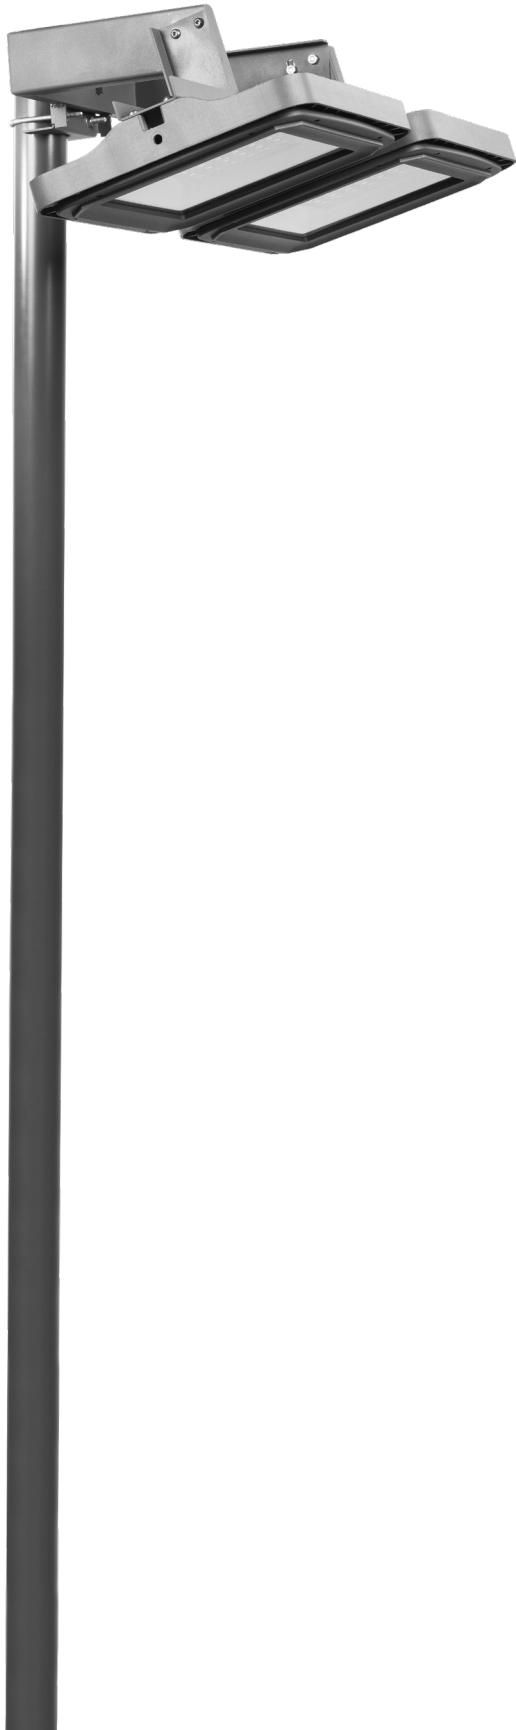



| CODE | POWER CONSUMPTION | LUMEN OUTPUT (lm) 3000K / 4000K | COLOUR TEMPERATURE | A (mm) | B (mm) |
|------------|-------------------|------------------------------------|--------------------|--------|--------|
| UA550011/M | 75W | 8250 / 9000 | 3000K / 4000K | 330 | 52 |
| UA550012/M | 100W | 11000 / 12000 | 3000K / 4000K | 330 | 52 |
| UA550013/M | 125W | 13750 / 15000 | 3000K / 4000K | 330 | 52 |
| UA550014/L | 150W | 16500 / 18000 | 3000K / 4000K | 400 | 52 |
| UA550015/L | 200W | 22000 / 24000 | 3000K / 4000K | 400 | 52 |
| UA550016/L | 250W | 27500 / 30000 | 3000K / 4000K | 400 | 52 |
| UA550017/L | 275W | 30250 / 33000 | 3000K / 4000K | 400 | 52 |

*Poles to be ordered separately. See tables on pages 386-391

| | |
|--------------------------------------|--|
| LED Type | High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. |
| Nominal Voltage | 220V-240V AC, 50/60Hz |
| Color Rendering Index | CRI> 80 standard and CRI>90 on request. |
| Optics | Asymmetric wide beam street light optics. |
| Materials | Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of steel with polyester powder coating. |
| Optional Coating | Marine grade. |
| Accessories | Adapted bracket for 2, 3 or 4 luminaires. Post-top mounting and other types of mounting systems can be accommodated with tilting mechanism. |
| Diffuser | Thermal-shock resistant tempered glass. |
| LED Specification | L90B50 > 100000 hours life time. |
| Control Systems | DALI Interface. |
| Energy Efficiency Class (EEC) | A++ |
| Operating Temperature | -40°C / +55°C |
| Power Factor | >0.95 |
| Protection Class | IP66 |
| Impact Resistance | IK09 |
| Insulation Class | Class I |
| Conformity | Complies with European Standards EN 60598 and CE certified. |

