


# iTivoli



The perfect style timeless luminaire to add a heritage look to any scheme. iTivoli interprets the form of the classic lantern into a new and contemporary type. Modularly designed luminaire with an elegant, transparent impression and state-of-the-art, efficient lighting technology.

Designed to last in extremely harsh environments.

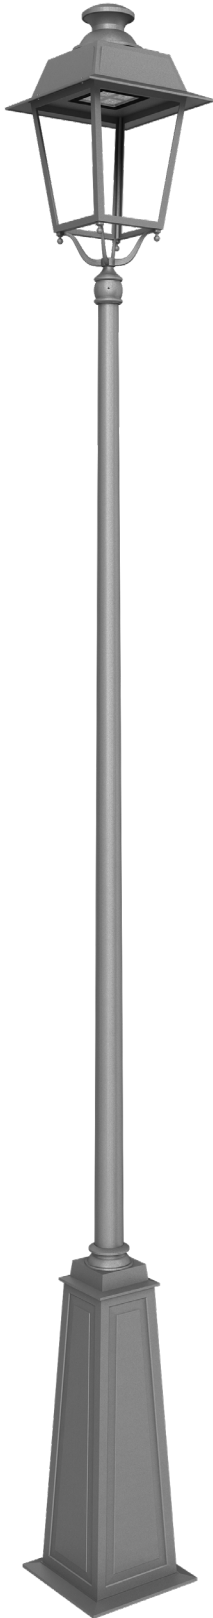



CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm) 3000K / 4000K	COLOUR TEMPERATURE	A (mm)	B (mm)	H (mm)	F (mm)
UA6941	54W	5940 / 6480	3000K / 4000K	450	885	4000 - 6000	400
UA6943	72W	7920 / 8640	3000K / 4000K	450	885	4000 - 6000	400

\*Poles to be ordered separately. See tables on pages 386-391

<b>LED Type</b>	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant.
<b>Nominal Voltage</b>	220V-240V AC, 50/60Hz
<b>Color Rendering Index</b>	CRI> 80 standard and CRI>90 on request.
<b>Optics</b>	Rotationally symmetrical 30° / 60° / 90° or asymmetrical M3 street optics.
<b>Materials</b>	Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. BSISQ® LED Module.
<b>Optional Coating</b>	Marine grade.
<b>Accessories</b>	Cast aluminium basement.
<b>Diffuser</b>	Thermal-shock resistant tempered glass.
<b>LED Specification</b>	L90B50 > 100000 hours life time. Calculation for LED fixtures are based on measurements that comply with LM-80.
<b>Energy Efficiency Class (EEC)</b>	A++
<b>Operating Temperature</b>	-40°C / +55°C
<b>Power Factor</b>	>0.95
<b>Control Systems</b>	1-10V, DALI Interface.
<b>Protection Class</b>	IP66
<b>Impact Resistance</b>	IK08
<b>Insulation Class</b>	Class I
<b>Conformity</b>	Complies with European Standards EN 60598 and CE certified.

