



Key Features

iLinus is a high-performance linear luminaire suitable for a wide range of wall washing, accent, surface grazing, and indirect lighting applications in architectural, hospitality, and retail environments. It has multiple customization options to illuminate interior walls, exterior facades, and unique architectural details.

Designed to last in extremely harsh environments.

Tunable White or DALI controllable, easy to install with the remote universal power supply and connect via combined power and data connectors.



Key Data


LED Type	High efficiency LEDs, Tunable White available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant.			
Nominal Voltage	198-264 V AC, 50/60Hz			
Optional Voltage	24V DC / PS (Constant Voltage)			
Color Rendering Index	CRI ≥ 80 standard and CRI ≥ 90 on request.			
Optics	Standard: 18° / 25° / 30°x90° / 60°x110° / 90°x110°. Custom optics upon request.			
Materials	Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. End to end connection via power connectors. Includes wall or ground mounting brackets. Power unit is built in.			
Diffuser	Thermal-shock resistant 5mm tempered glass.			
LED Life Time	L80 B10 70.000h Ta 25°C L80 B10 50.000h Ta 40°C			
Operating Temperature	-40°C / +55°C			
Power Factor	>0.95			
Control Systems	DMX / RDM, DALI Interface.			
Protection Class	IP66			
Impact Resistance	IK09			
Insulation Class	Class I			
Conformity	Complies with European Standards EN 60598 and CE certified.			

© Copyright BSI Lighting 2023. We reserve the right to change specifications without prior notification. Due to the technological evolution of the electronic components, the data provided may be updated. Product illustrations serve as examples and may differ from the original.

bsilighting.com




Technical Drawing -

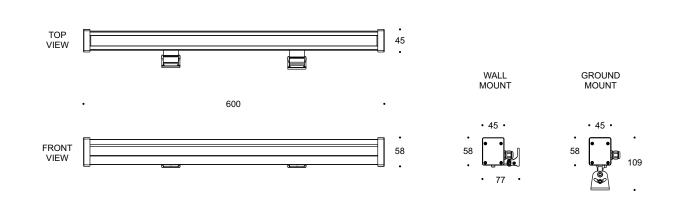

Information -

CODE	LENGTH (mm)	LED QTY	POWER CONSUMPTION	LUMEN OUTPUT (Im) 2700K / 6500K
AR9344701 TUNABLE	600	64	22W	2911

Light Distribution Curve -



Accessories



Bracket Code: WB1001



Ground Mounting Bracket Code: GB1001



IP68 Plug Power Connector Set (Two pieces) Code: CON1202



T-Connector Code: TC4001

© Copyright BSI Lighting 2023. We reserve the right to change specifications without prior notification. Due to the technological evolution of the electronic components, the data provided may be updated. Product illustrations serve as examples and may differ from the original.