

Ceiling

iLevel Pendant stands as the perfect lighting solution for various settings. It adds a touch of style and pleasant illumination, enhancing environments with a modern and elegant design.

Architectural ceiling lighting range inspires architects, designers and system integrators with its exceptional quality, homogenous beam angles and remarkable creativity.

High Performance and Uniform



iLevel Pendant is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on ceilings.

Continuous LED aluminium profiles installed continuously to create uniform lines of light and provide high visual comfort.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

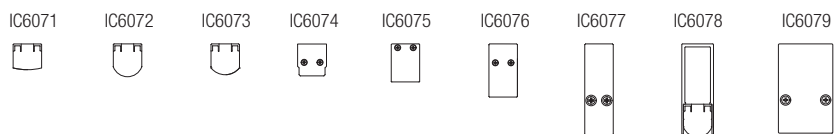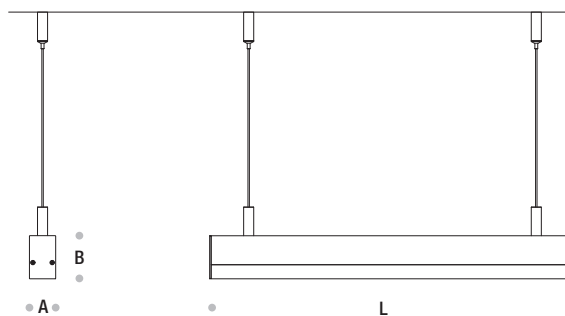


iLevel Pendant						
Codes	Power	Colour Temperature	A (mm)	B (mm)	L (mm)	
IC6071	10W / 14W / 16W / 18W	3000K / 4000K	19	17	1000	
IC6072	10W / 14W / 16W / 18W	3000K / 4000K	19	21	1000	
IC6073	10W / 14W / 16W / 18W	3000K / 4000K	19	20	1000	
IC6074	10W / 14W / 16W / 18W	3000K / 4000K	19	21	1000	
IC6075	10W / 14W / 16W / 18W	3000K / 4000K	19	25	1000	
IC6076	10W / 14W / 16W / 18W	3000K / 4000K	19	35	1000	
IC6077	10W / 14W / 16W / 18W	3000K / 4000K	19	60	1000	
IC6078	10W / 14W / 16W / 18W	3000K / 4000K	21	60	1000	
IC6079	10W / 14W / 16W / 18W	3000K / 4000K	36	60	1000	



iLevel Pendant



For detailed information about the iLevel Pendant

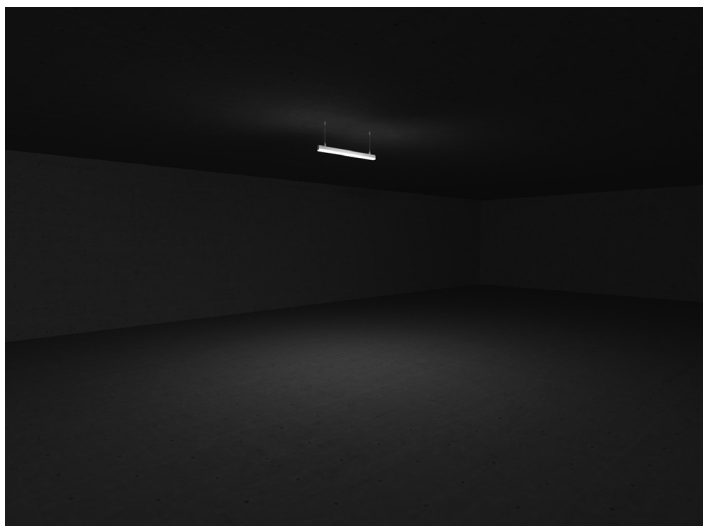

Diffused beam

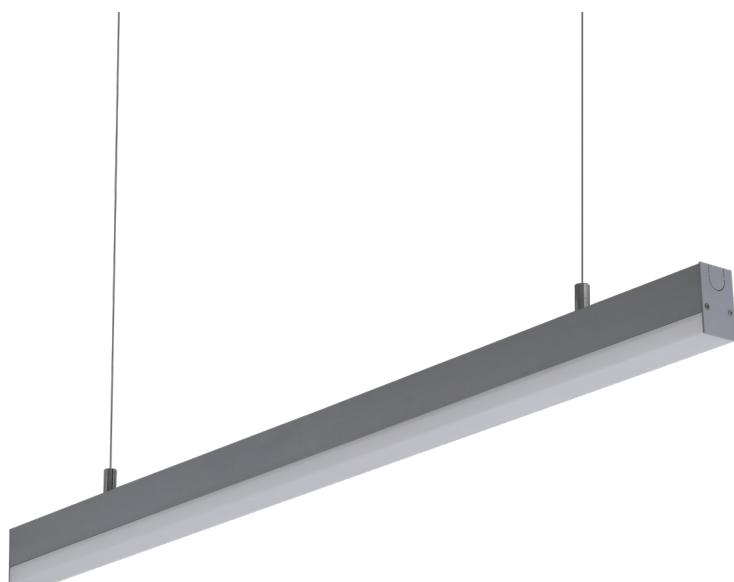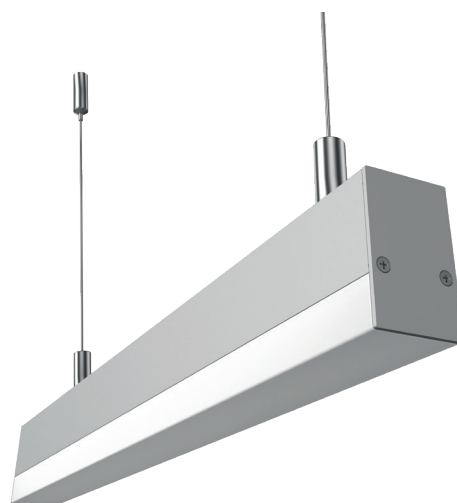

Technical Features

Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Operates with a remote driver. Includes waterproof connectors.

BSILINEA® LED Module.

LED MacAdam Step 3

Nominal Voltage 24V DC

Operating Temperature -40°C / +55°C

Control Systems On-Off, 1-10V DIM, DALI Interface (External)

Protection Class IP65

Impact Resistance IK08

Insulation Class III

Complies with EN60598 and relevant standards.