

# Pario Neon

## Linear Surface

LED luminaire for outdoor architectural lighting with a perfectly homogeneous and dot-free light surface.

Architectural flexible LED linear range inspires architects, designers and system integrators with its exceptional quality, homogeneous light output and remarkable creativity.

### Solid and Versatile





Encapsulated luminaire with excellent durability, solid construction and chemical resistance. Pario can be manufactured in custom lengths using a wide range of LED colours and brightness to meet your design requirements.

Exceptional performance and compact dot-free, homogeneous light emission surface with impressive versatility.

### Slim Design and Easy to Install

The slim luminaire, which is equipped with an external power supply unit, is optionally available with DMX or DALI control or in the user-friendly On-Off version.

The watertight connector system ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

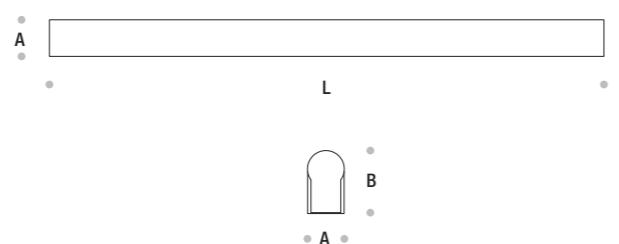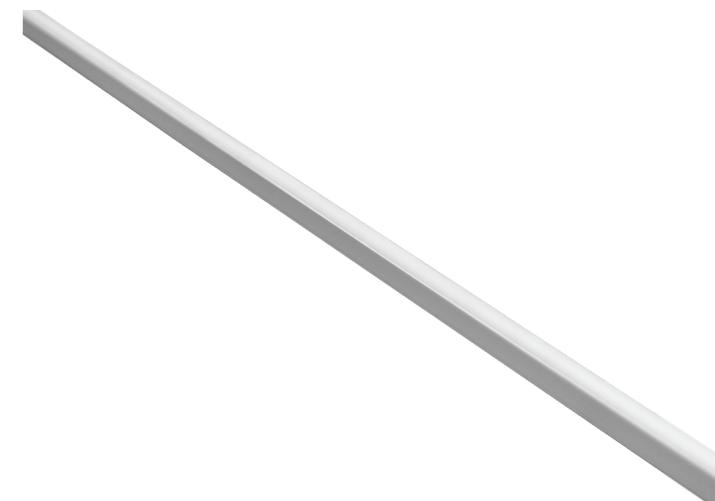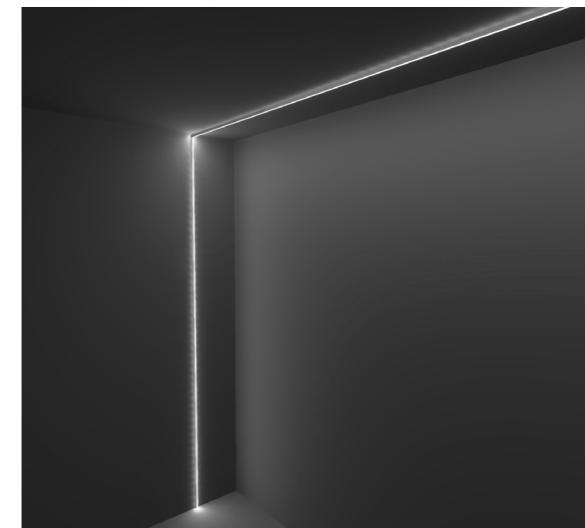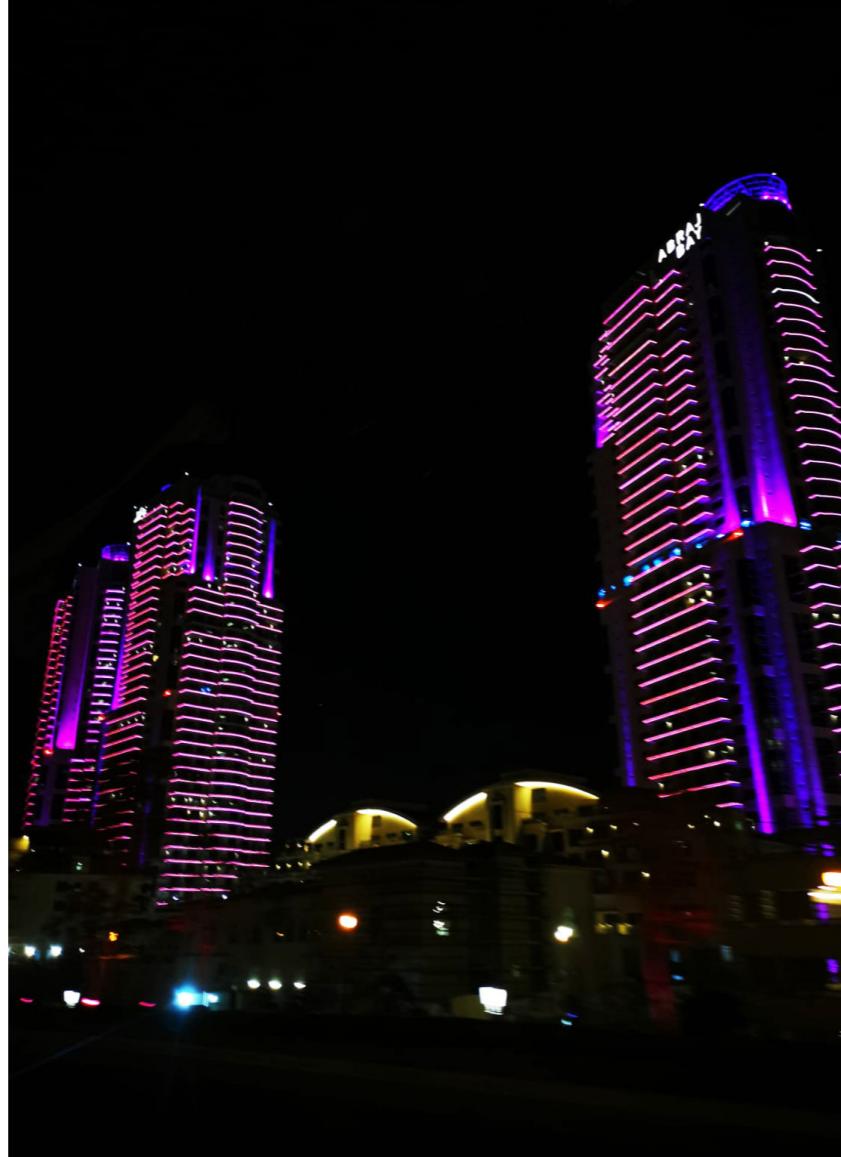

### Pario Neon

Codes	Power	A (mm)	B (mm)	L (mm)	Colour Temperature
AR187751	10W	8	16	1000	3000K - 4000K
AR187761	10W	8	16	1000	RGB



For detailed information about the Pario Neon

### Technical Features

Super Bright NICHIA LEDs mounted on a circuit board bonded with Polyimide Film for exceptional insulating. Ultra Flexible and unbreakable PVC jacket housing to enhance thermal conductivity.

LED MacAdam Step 3

Nominal Voltage 24V DC

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DMX / RDM, DALI Interface (External)

Protection Class IP66

Impact Resistance IK08

Insulation Class III

Complies with EN60598 and relevant standards.

