

Bollards



The modern, discreet design of the iAlbus makes it a timeless lighting bollard blending in every kind of environment. Designed with comfort reflectors that provide 360° distribution and direct the light entirely onto the walking area, ensuring great performance without glare or light pollution.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Clear and Functional


Smooth, round, decorative bollard and light column with clear lines and aluminium reflectors provide high visual comfort and glare control.

The various modes of installation and the orientability of the product respond to specific functional and architectural requirements of every urban context. Basic form in geometry meets the most innovative


Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

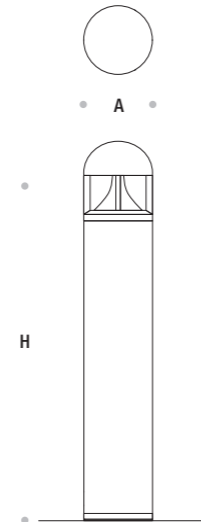

iAlbus				
Codes	Power	Colour Temperature	A (mm)	H (mm)
LB796301	12W	3000K / 4000K	160	600
LB796302	12W	3000K / 4000K	160	900

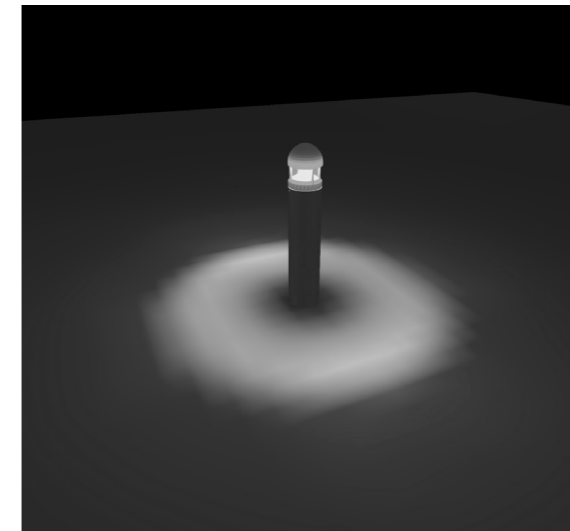

Rotational light distribution



Available in Black colour



Available in Corten colour



Available in Silver colour



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iAlbus