

## Wall Washers Recessed

Defining architectural spaces with precision optics. Architectural in-ground linear LED Washer range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

### High Performance and Innovative



High performance and compact linear wall washing and wall grazing luminaires with impressive versatility.

Innovative light sources and precise optical systems combine to form a high impact and low maintenance lighting system.

### Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

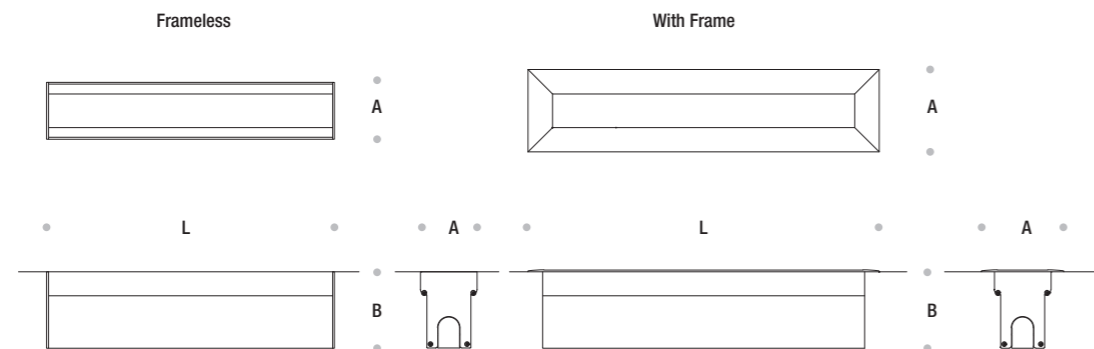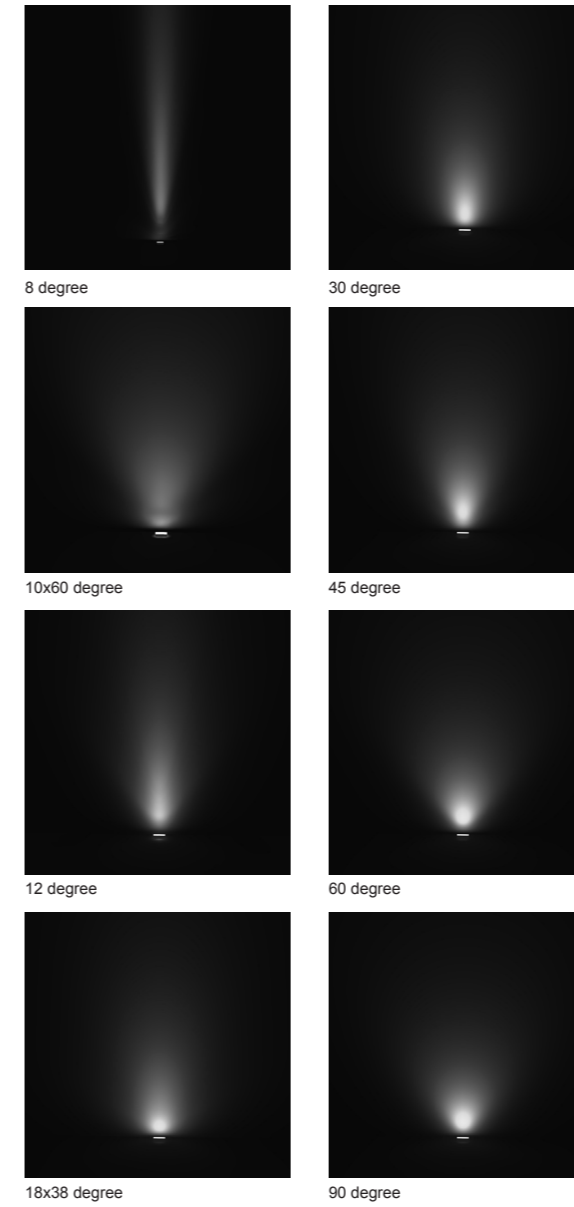

iAxis Mono Recessed						
Codes	Power	A (mm) Frameless	A (mm) With Frame	B (mm)	L (mm) Frameless	L (mm) With Frame
AR8122251	12W	64	92	85	314	367
AR8122253	24W	64	92	85	614	667
AR8122255	36W	64	92	85	914	967
AR8122411	12W	64	92	85	514	567
AR8122413	24W	64	92	85	1014	1067
AR8122415	36W	64	92	85	1514	1567
AR8122416	9W	64	92	85	514	567
AR8122417	18W	64	92	85	1014	1067

### Technical Features

Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Power unit is built in. End-to-end connection via power connectors. Includes recessing box.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP67

Impact Resistance IK10

Insulation Class I

Complies with EN60598-1 and relevant standards.

iAxis Mono Recessed



For detailed information about the iAxis Mono Recessed