

Wall Washers Recessed

Defining architectural spaces with precision optics. Architectural in-ground linear LED Washer range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

High Performance and Innovative



High performance and compact linear wall washing and wall grazing luminaires with impressive versatility and feature superb color mixing and uniform light distribution.

Innovative light sources and precise optical systems combine to form a high impact and low maintenance lighting system.


Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

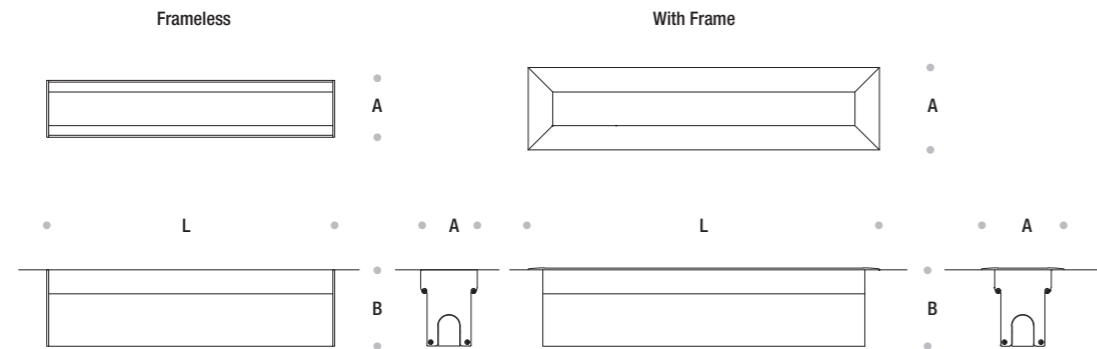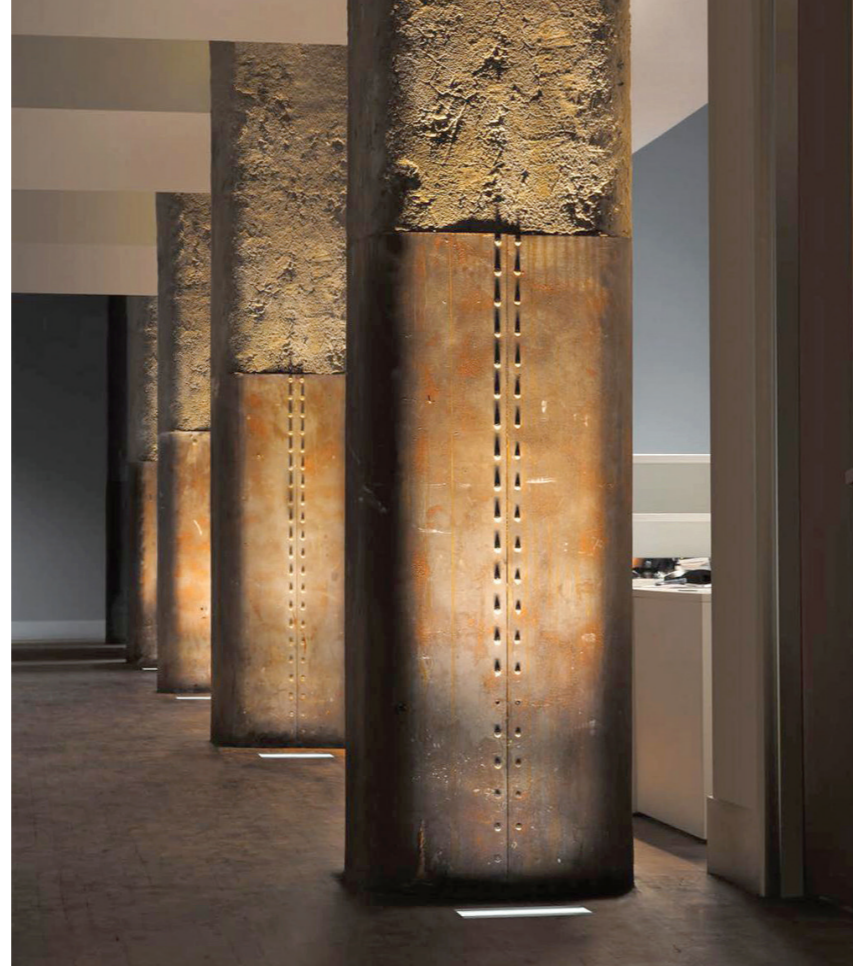

iAxis RGB-RGBW Recessed							
Codes	Power	A (mm) Frameless	A (mm) With Frame	B (mm)	L (mm) Frameless	L (mm) With Frame	
AR8122251 RGB	12W	64	92	85	520	567	
AR8122253 RGB	24W	64	92	85	1020	1067	
AR8122255 RGB	36W	64	92	85	1520	1567	
AR8122257 RGB	27W	64	92	85	920	967	
AR8122258 RGB	36W	64	92	85	1220	1267	
AR8122259 RGB	45W	64	92	85	1520	1567	
AR8122260 RGBW	12W	64	92	85	520	567	
AR8122261 RGBW	24W	64	92	85	1020	1067	
AR8122262 RGBW	36W	64	92	85	1520	1567	
AR8122264 RGBW	24W	64	92	85	920	967	
AR8122265 RGBW	32W	64	92	85	1220	1267	
AR8122266 RGBW	40W	64	92	85	1520	1567	

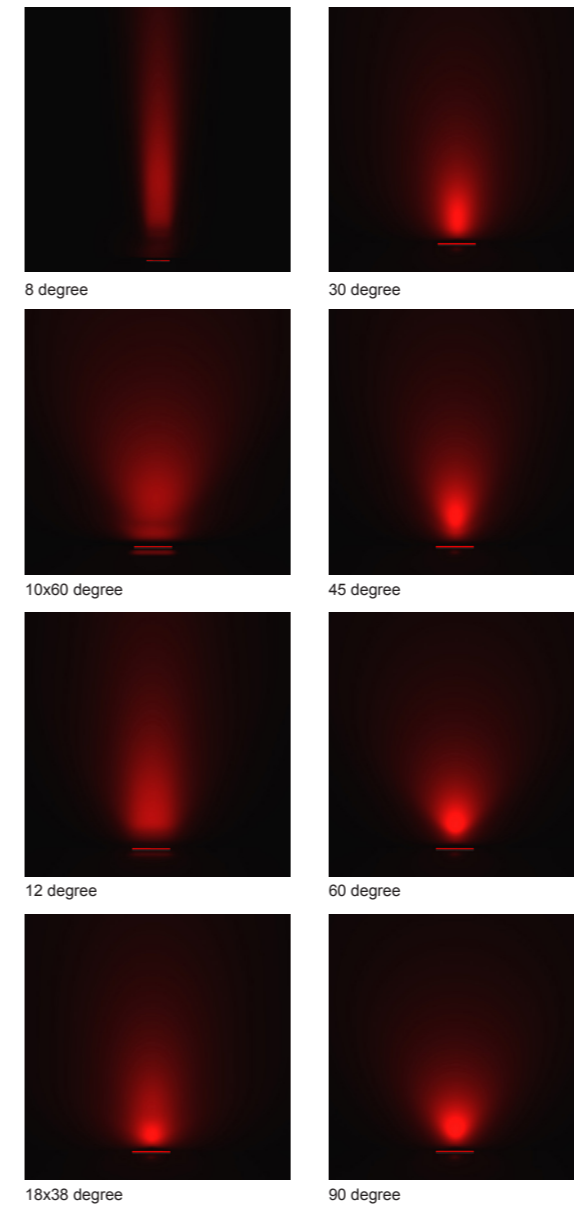

Technical Features

Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Power unit is built in. End-to-end connection via power connectors. Includes recessing box.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems DMX / RDM, DALI Interface

Protection Class IP67

Impact Resistance IK10

Insulation Class I

Complies with EN60598-1 and relevant standards.