



Functional design with adjustable brackets and a wide range of optics provides a flexible approach to accent and architectural lighting.

Architectural floodlight range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

Compact and Creative


With precise optics, the iClax series are used for accent lighting on facades or to illuminate objects from a medium distance.

The combination of floodlights with different optics makes creative lighting scenarios possible.

Integrated Solution and Clean Design

Plug and play built-in system with the fully integrated universal power supply unit.

iClax is a compact and high-performance projector. The luminaire features a clean design and minimal thickness, producing a luminous flux of exceptional intensity and visual quality.

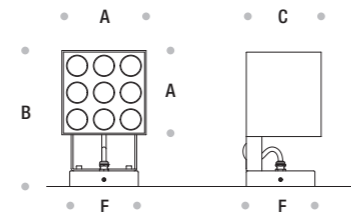

Louvre



18x38 degree



Available in Black colour



Available in Corten colour



Available in Silver colour



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of steel with polyester powder coating.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DMX / RDM, DALI Interface

Protection Class IP66

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.

iClax						
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)	F (mm)
FL9171	8W	MONO / RGBW / DW	90	130	105	90
FL9172	18W	MONO / RGB	150	190	120	110
FL9173	24W	MONO / RGB / RGBW / DW	170	210	135	110
FL9174	32W	MONO / RGBW / DW	200	240	150	110



For detailed information about the iClax