



iCubsu Series provide an elegant solution for lighting various environments in towns and cities such as urban and residential streets, squares, parks, pedestrian areas and car parks.

Architectural floodlight range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

High Performance and Creative


With precise optics, the iCubus series are used for accent lighting on facades or to illuminate objects from a long distance.

The combination of floodlights with different optics makes creative lighting scenarios possible.


Integrated Solution and Modern Design

Plug and play built-in system with the fully integrated universal power supply unit.


The entire family appears in a uniform and durable modern design. A wide range of attractive accessories; honeycomb louvre and glare shield, as well as mounting types such as floor, wall and pole.

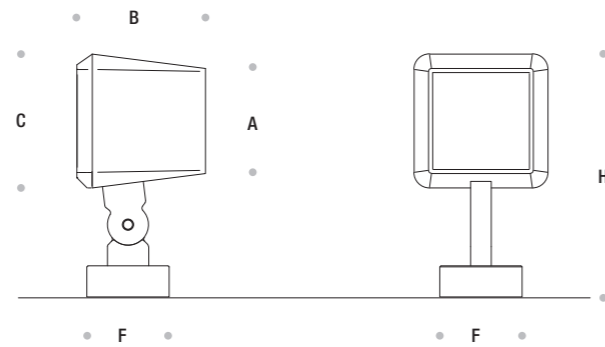


iCubus							
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)	H (mm)	F (mm)
FL9322	12W	3000K / 4000K	100	125	130	235	80
FL9324	24W	3000K / 4000K	100	125	130	235	80
FL9326	36W	3000K / 4000K	160	185	190	305	120
FL9328	48W	3000K / 4000K	160	185	190	305	120
FL9330	72W	3000K / 4000K	200	235	240	370	150
FL9332	108W	3000K / 4000K	200	235	240	370	150
FL9334	144W	3000K / 4000K	200	235	240	370	150

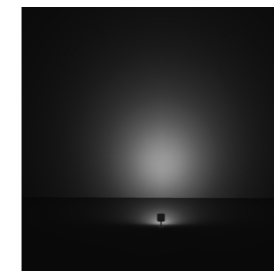

40 degree

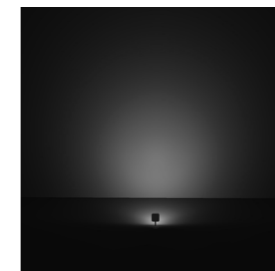

60 degree

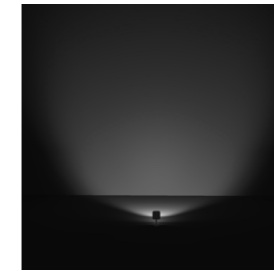

90 degree




Available in Black colour



Available in Corten colour



Available in Silver colour

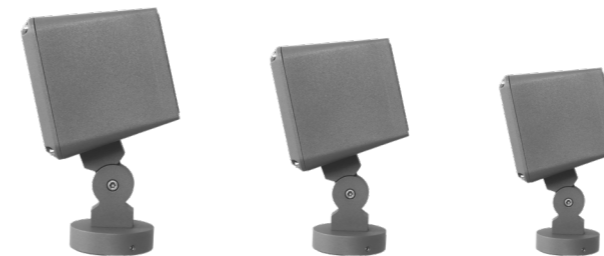

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of aluminium with polyester powder coating.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DMX / RDM, DALI

Protection Class IP66

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iCubus