

Lighting system for large urban areas with asymmetrical and symmetrical optics with independent modules for excellent illuminance uniformity and optimum visual comfort. The remarkably refined design of iFizy enhances the urban landscape. From residential areas, streets to squares, parks and public spaces, the system perfectly blends into various urban districts.

Architectural LED lighting luminaire range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

**Distinctive and Effective**


With its distinctive and elegant design, the iFizy luminaire is a plus for creating a unique identity for any environment. The clear and pure lines of the fixture play an important aesthetic role both by day and by night.

The luminaire with stylized appearance and with improvements in installation, maintenance and service life offers a wide variety of light distributions that ensure effective values, visual comfort and light output for pedestrian areas and streets without light pollution. The possibility to use various photometric distribution with optional mounting heights allows designers to illuminate differing urban spaces with original system configurations.

**Modern Design and Easy to Install**

The modernly designed luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

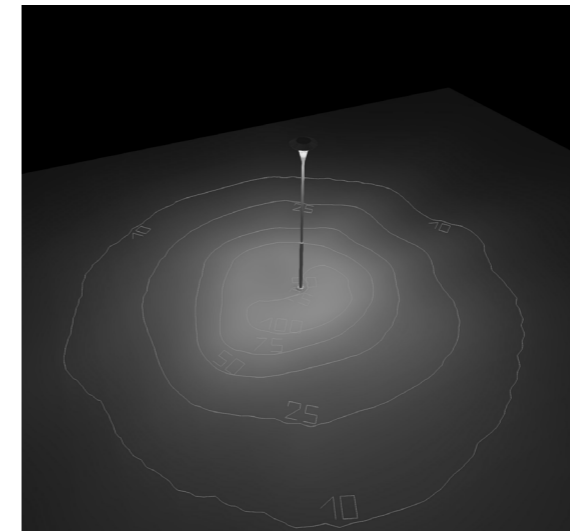

BSIFIX® LED Module




Available in Black colour



Available in Corten colour



Available in Silver colour

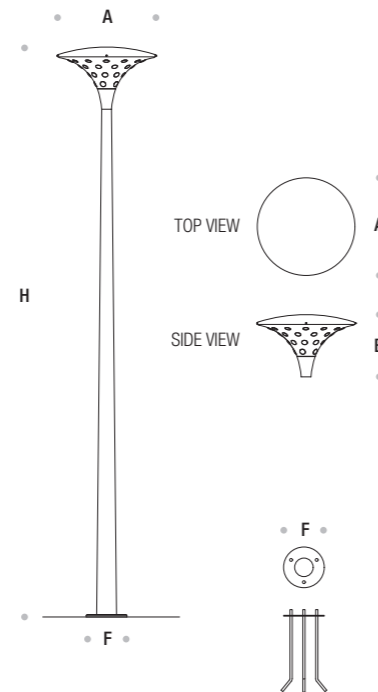

iFizy						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F (mm)
UA1452/SYM	72W	3000K / 4000K	800	640	5000 / 6000	300
UA1453/ASY	108W	3000K / 4000K	800	640	5000 / 6000	300
UA1454/SYM	54W	3000K / 4000K	600	380	3000 / 4000	250
UA1455/ASY	72W	3000K / 4000K	600	380	3000 / 4000	250

\*Poles to be ordered separately. See tables on pages 470 - 475.

**Technical Features**

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. BSIFIX® LED Module.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C


Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

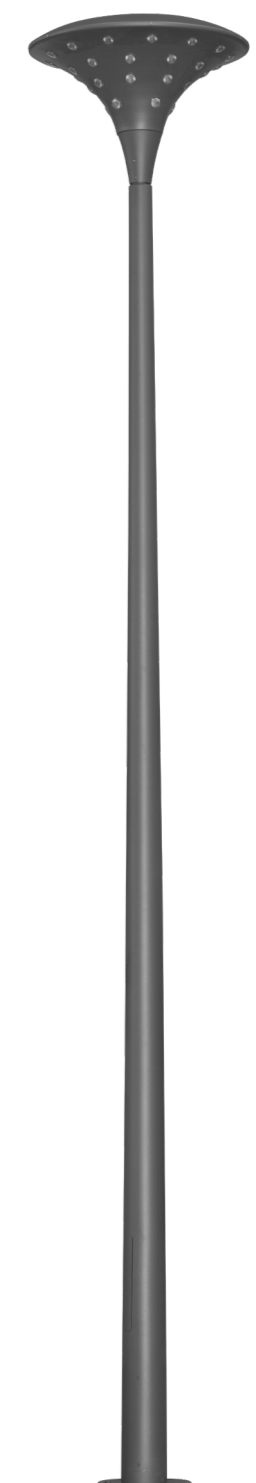

For detailed information about the iFizy