

Wall Recessed



Recessed wall lights are ideal for lighting wall perimeters for pathways and stairways.

Architectural wall recessed die-cast aluminium LED recessed range inspires architects, designers and system integrators with its exceptional quality, homogeneous beam and remarkable creativity.

Compact and High Performance

Innovative light sources with low recessing depth combine to form a high impact and low maintenance product.

iLarix is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on walls.

Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.

The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.



iLarix



For detailed information about the iLarix

iLarix

| Codes | Power | Colour Temperature | A (mm) | H (mm) |
|--------|-------|--------------------|--------|--------|
| AC5082 | 3W | 3000K / 4000K | 130 | 80 |
| AC5084 | 6W | 3000K / 4000K | 130 | 80 |

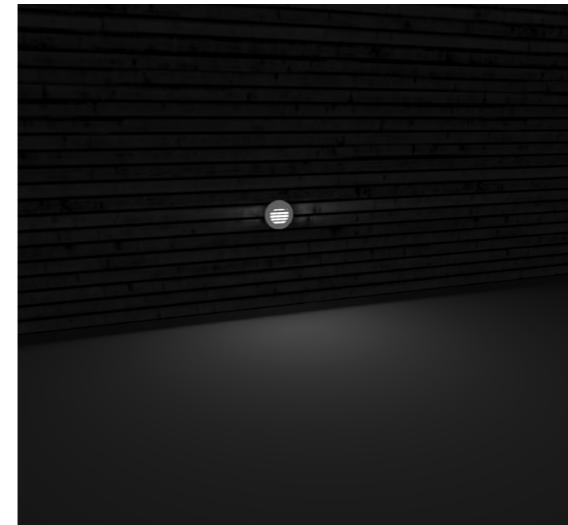

120 degree



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Includes recessing box.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems On - Off

Protection Class IP66

Impact Resistance IK10

Insulation Class I

Complies with EN60598 and relevant standards.