

Urban & Area

The clear luminaire fits a variety of site designs and architectural styles in street and urban decor installations, and its compact housing strikes an aesthetic balance for varying pole heights and spacing. The harmonious design of the housing fits in ideally in squares, historic centres and pedestrian walkways.

Architectural LED lighting luminaire range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

Innovative and Attractive


Visually decorative and technically innovative, the iMetis post-top luminaires score points with their attractive design and innovative lighting technology. The optical properties can be individually adapted using a large selection of lenses.

The luminaire with stylized appearance and with improvements in installation, maintenance and service life offers a wide variety of light distributions that ensure effective values, visual comfort and light output for pedestrian areas and streets without light pollution. The possibility to use various photometric distribution with optional mounting heights allows designers to illuminate differing urban spaces with original system configurations.


Modern Design and Easy to Install

The modernly designed luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.





40 degree




60 degree



Available in Black colour




90 degree



Asymmetric M3




Available in Corten colour



M3



Available in Silver colour

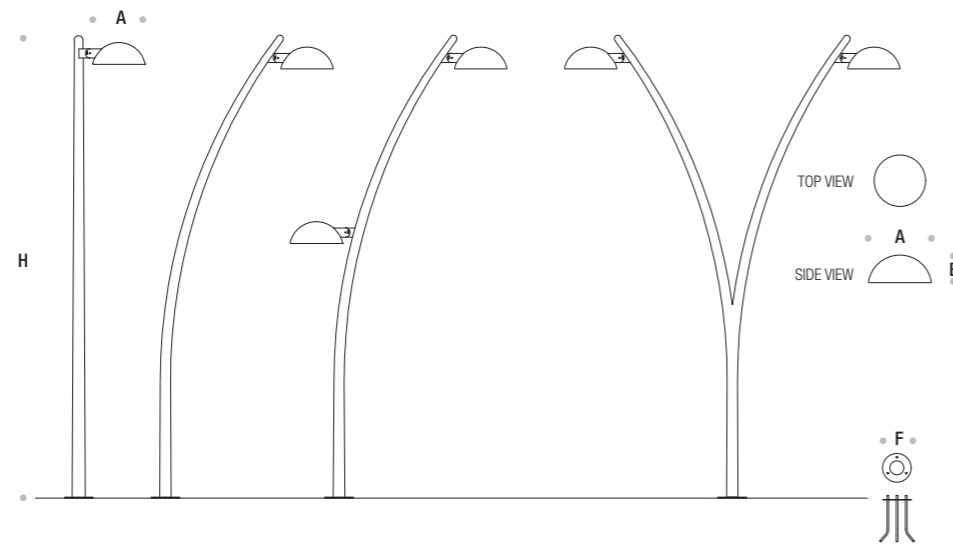

iMetis						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F (mm)
UA1133 ST	72W	3000K / 4000K	450	190	4000 / 5000	250
UA1135 ST	120W	3000K / 4000K	550	240	4000 / 5000	250

*Poles to be ordered separately. See tables on pages 470 - 475.



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of aluminium with polyester powder coating.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.

