

Light Columns

Light column and bollard series with minimal and robust design in different heights, ideal for ambient illumination of squares, avenues, paths, parks, walkways and gardens. Vertical diffused lighting distribution developed for iOtto guarantees visual comfort, safety and improved quality of space.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Smooth and Pure


Smooth, decorative bollard and light column with clear lines and opal diffusers provide high visual comfort and glare control. The modular luminaires, based on round shape aluminium profile and housing, offer various aesthetic and performance solutions.

For all its diversity and flexibility, iOtto with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

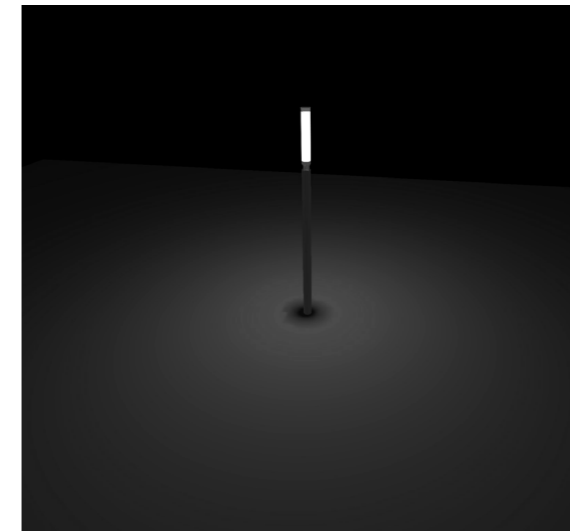

Rotational Light Distribution




Available in Black colour



Available in Corten colour



Available in Silver colour

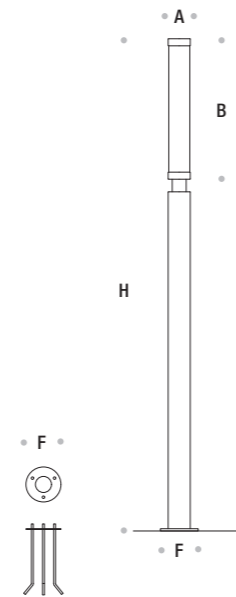

iOtto						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F (mm)
UA1530	54W	3000K / 4000K	157	900	3500	250

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iOtto

