

Bollards



iPark is a family of robust and high-quality construction bollards, designed on the basis of rectangular shapes. Offers LED technology solutions for the lighting of pathways and urban areas. The innovative optical systems designed for the iPark line guarantee visual comfort, safety and enhanced quality of space.

Architectural LED light column and bollard range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Modular and Refined


Efficient design that features tremendous modularity and ease of use. iPark is made of extruded aluminum, resulting in a form with simplicity matches its function.

The iPark family of luminaires creates beautiful and intentional light emanating from a refined design. The various modes of installation and the orientability of the product respond to specific functional and architectural requirements of every urban context.


Integrated Solution and Easy to Install

The iconic luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

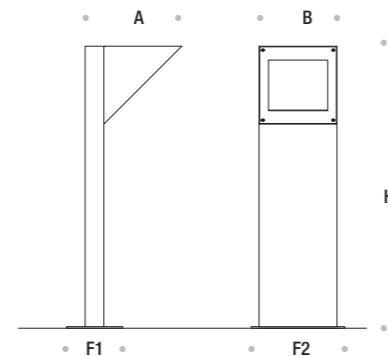

iPark							
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F1 (mm)	F2 (mm)
LB2112	12W	3000K / 4000K	300	200	1000	180	240

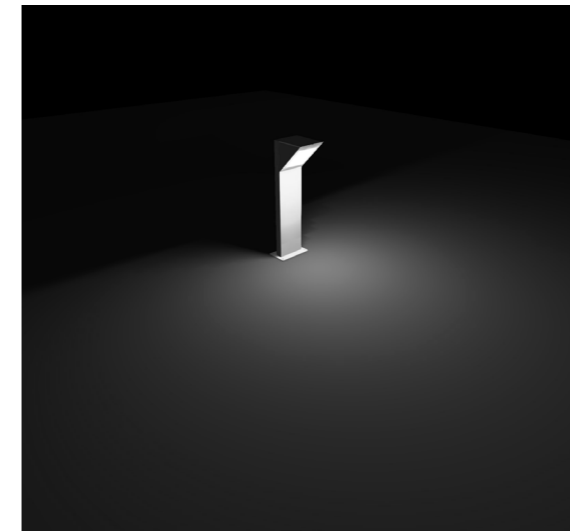


Diffused beam




Available in Black colour



Available in Corten colour



Available in Silver colour

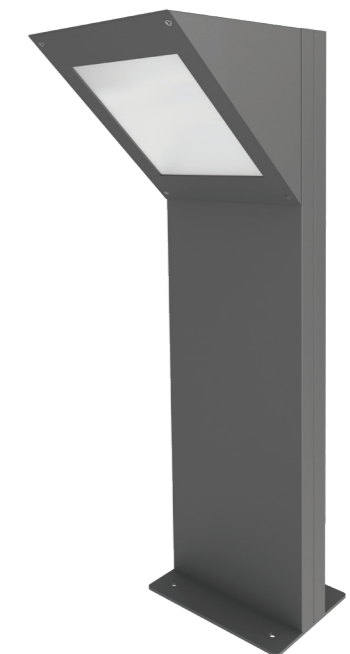

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iPark