

## Bollards

iRuta R SQ bollard is a beautiful addition to urban landscapes and traditional and contemporary architecture, enhancing but not altering the composition. The luminaire with advanced LED optical design provides directional illumination and excellent visibility to extend the safe use of outdoor spaces.

Architectural LED bollard and light bollard range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

### Refined and Attractive



Refined bollard with clear lines provide functional illumination and glare control. The modular luminaires, based on elegant design aluminium profile and housing, offer exceptional durability and strong continuity in design.

For all its diversity and flexibility, iRuta with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.


### Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

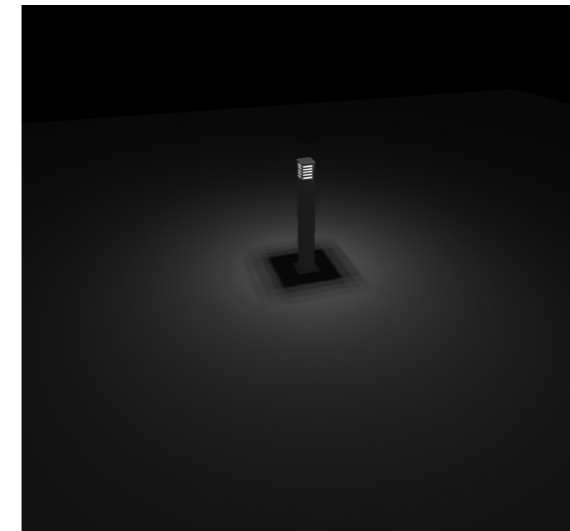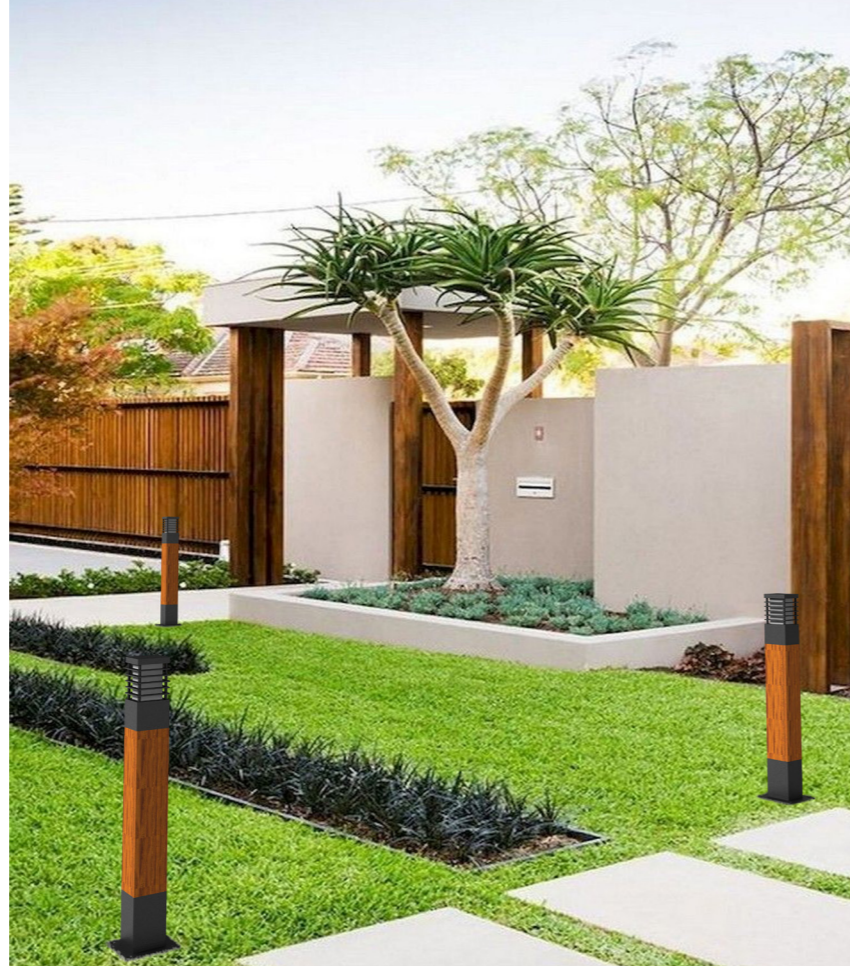


Rotational light distribution





Available in Black colour



Available in Corten colour



Available in Silver colour

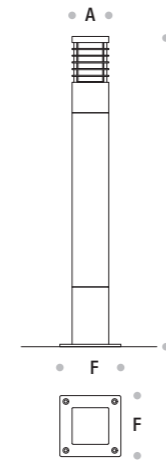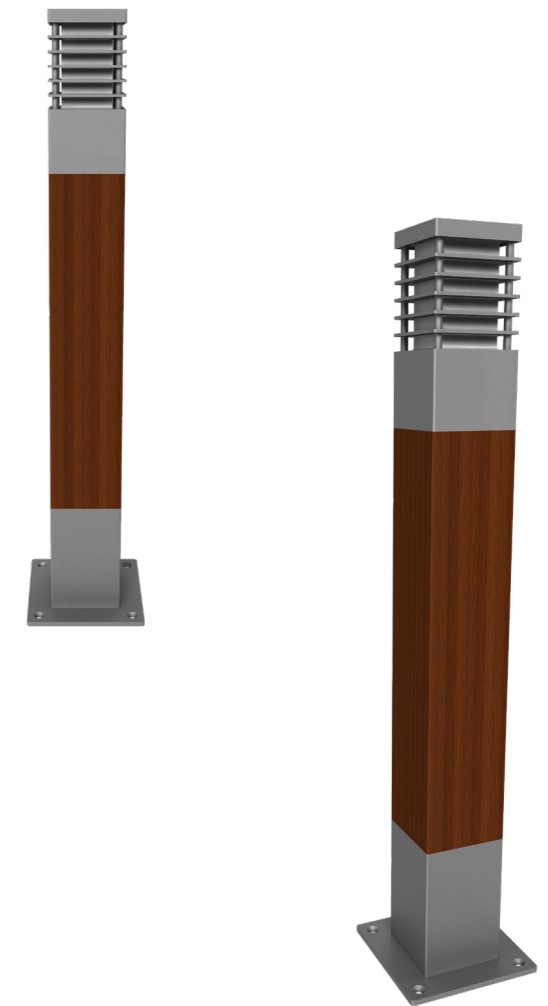

iRuta R SQ					
Codes	Power	Colour Temperature	A (mm)	H (mm)	F (mm)
LB2823	24W	3000K / 4000K	120	1000	200

### Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in light gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

iRuta R SQ



For detailed information about the iRuta R SQ