

Floodlighting

The iSigma floodlight is a reliable partner for any project, large or small. Its compact size makes it the perfect solution and offers more than expected.

Architectural floodlight range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

Stylish and Creative


A stylish but discreet spotlight that will give your outdoor space the accent it deserves at night. Available as a wall lamp or a minimalist ground spike.

The combination of floodlights with different optics makes creative lighting scenarios possible. Innovative optic technology with special lenses provides a combination of comfort, power and a clear, sharp light beam.


Integrated Solution and Elegant Design

Plug and play built-in system with the fully integrated universal power supply unit.

Adjustable micro spotlight is easily integrated into the gardens, facades and walkways, enhances the scene with quality light.




15 degree



24 degree



Available in Black colour



36 degree




60 degree



Available in Corten colour



Available in Silver colour

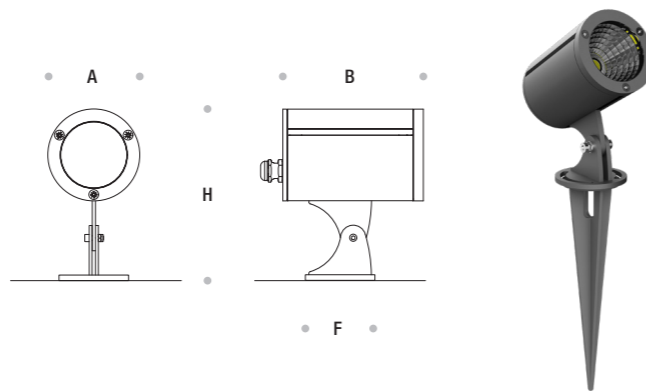

iSigma						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F (mm)
FL928101	3W	3000K / 4000K	66	120	125	60
FL928102	6W	3000K / 4000K	66	120	125	60
FL928103	9W	3000K / 4000K	66	120	125	60
FL928104	12W	3000K / 4000K	102	180	190	80
FL928105	18W	3000K / 4000K	102	180	190	80
FL928106	24W	3000K / 4000K	127	245	235	100
FL928107	38W	3000K / 4000K	127	245	235	100



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems On-Off, 1-10V DIM, DALI Interface

Protection Class IP67

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

