

Wall Mounted



The iTetta series is a range of aluminium cubic volumes presented in different combinations. The defining characteristic of this lighting range is its timeless formal purity, which makes it ideal for use in both living and contract spaces. Available in three sizes.

Architectural wall lighting range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

**Innovative and High Performance**


Defining architectural spaces with precision optics. Innovative light sources and precise optical systems combine to form a high impact and low maintenance lighting system.

iTetta is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on walls.


**Integrated Solution and Easy to Install**

Plug and play built-in system with the fully integrated universal power supply unit.


The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

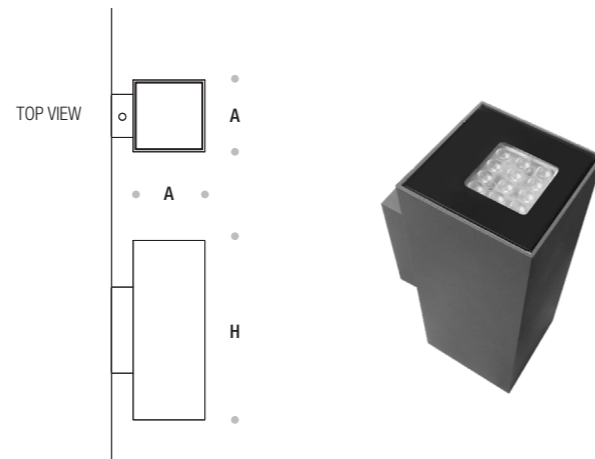


iTetta				
Codes	Power	Colour Temperature	A (mm)	H (mm)
WA4112	1 x 3W	3000K / 4000K	100	115
WA4114	1 x 9W	3000K / 4000K	100	115
WA4116	1 x 14W	3000K / 4000K	100	115
WA4118	1 x 24W	3000K / 4000K	150	165
WA4120	1 x 39W	3000K / 4000K	150	165
WA4122	1 x 54W	3000K / 4000K	150	165
WA4124	2 x 3W	3000K / 4000K	100	200
WA4126	2 x 9W	3000K / 4000K	100	200
WA4128	2 x 14W	3000K / 4000K	100	200
WA4130	2 x 24W	3000K / 4000K	150	300
WA4132	2 x 39W	3000K / 4000K	150	300
WA4134	2 x 54W	3000K / 4000K	150	300





10x60 degree




12 degree



Available in Black colour

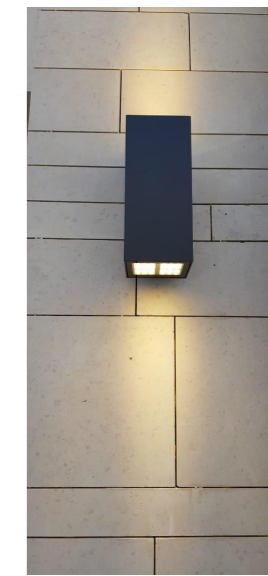


18x38 degree




30 degree




Available in Corten colour




45 degree




60 degree

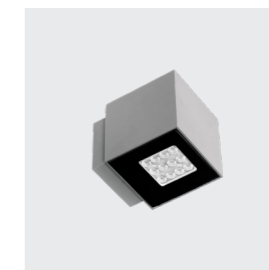

Available in Silver colour



90 degree

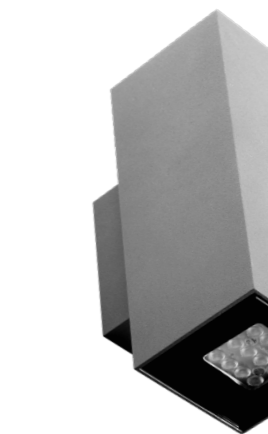

Technical Features
Corrosion resistant double layer polyester powder coated paint finish aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.
LED MacAdam Step 3
Nominal Voltage 220V-240V AC, 50/60Hz
Operating Temperature -40°C / +55°C
Control Systems On - Off
Protection Class IP66
Impact Resistance IK10
Insulation Class I
Complies with EN60598 and relevant standards.

