

Wall Mounted



iTubo is a round, up and down wall lamp that is the definition of elegant and minimalist design. The luminaire can be installed both horizontally and vertically, making it even more versatile to fit into existing systems. Available in four sizes.

Architectural wall lighting range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

**Innovative and High Performance**


Defining architectural spaces with precision optics. Innovative light sources and precise optical systems combine to form a high impact and low maintenance lighting system.

iTubo is a compact and high performance luminaire with impressive versatility. Suitable for easy installation on walls.


**Integrated Solution and Easy to Install**

Plug and play built-in system with the fully integrated universal power supply unit.


The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

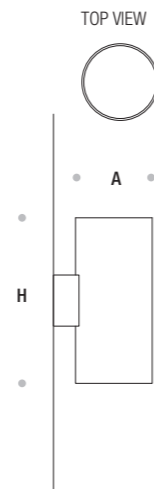

iTubo				
Codes	Power	Colour Temperature	A (mm)	H (mm)
WA4101	1 x 3W	3000K / 4000K	60	100
WA4102	1 x 9W	3000K / 4000K	90	140
WA4103	1 x 12W	3000K / 4000K	120	170
WA4104	1 x 18W	3000K / 4000K	150	210
WA4105	2 x 3W	3000K / 4000K	60	170
WA4106	2 x 9W	3000K / 4000K	90	210
WA4107	2 x 12W	3000K / 4000K	120	250
WA4108	2 x 18W	3000K / 4000K	150	280





10x60 degree




12 degree



Available in Black colour

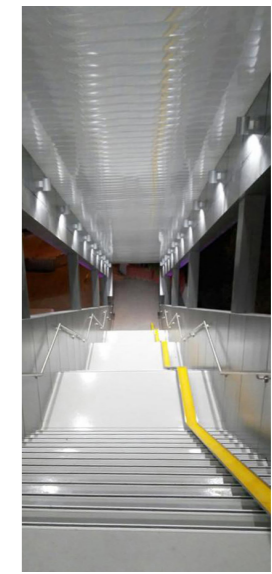


18x38 degree




30 degree



Available in Corten colour




45 degree




60 degree



Available in Silver colour



90 degree

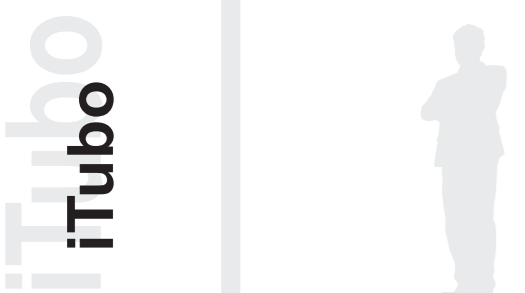

For detailed information about the iTubo

Technical Features
Corrosion resistant double layer polyester powder coated paint finish aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.
LED MacAdam Step 3
Nominal Voltage 220V-240V AC, 50/60Hz
Operating Temperature -40°C / +55°C
Control Systems On - Off
Protection Class IP66
Impact Resistance IK10
Insulation Class I
Complies with EN60598 and relevant standards.