

Bollards

Outdoor bollard series with minimal and robust design in different heights, ideal for ambient illumination of outdoor areas, paths, parks, walkways and gardens. Homogeneous and glare-free light beams offer a high level of visual comfort and create a welcoming ambiance.

Architectural LED bollard and light bollard range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Refined and Attractive


Refined bollard with clear lines provide high visual comfort and glare control. The modular luminaires, based on elegant design aluminium profile and housing, offer exceptional durability and strong continuity in design.

For all its diversity and flexibility, iUntel with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

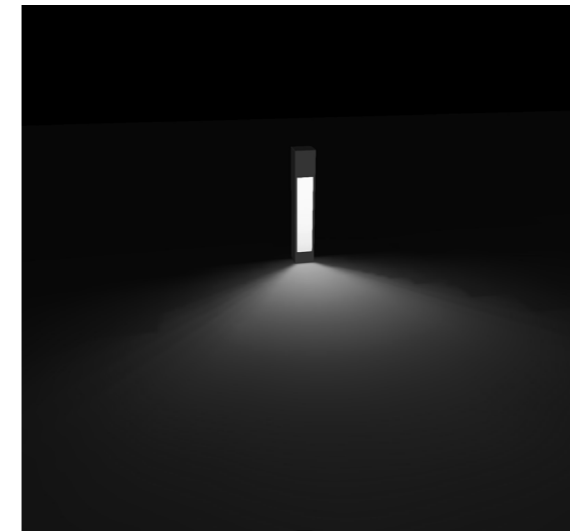

M3




Available in Black colour



Available in Corten colour



Available in Silver colour

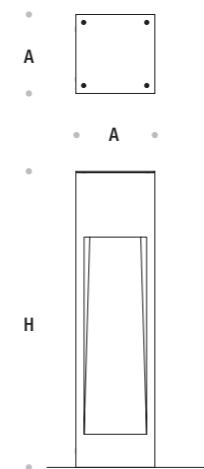

iUntel				
Codes	Power	Colour Temperature	A (mm)	H (mm)
LB742511	12W	3000K / 4000K	120	450
LB742512	18W	3000K / 4000K	120	800
LB742513	27W	3000K / 4000K	120	1200

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

