

Bollards

Create a feeling of well-being and comfort in outdoor areas with the iVoli bollard. Its simple, modern design blends successfully into any landscape. Directed beam technology with innovative optical modules developed for iVoli guarantees visual comfort, safety and improved quality of space.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Modular and Creative


Elegant bollard with clear lines and directed beam provide high visual comfort and glare control. The modular luminaires, based on elegant design aluminium profile and housing, offer various aesthetic and performance solutions.

For all its diversity and flexibility, iVoli with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.


Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

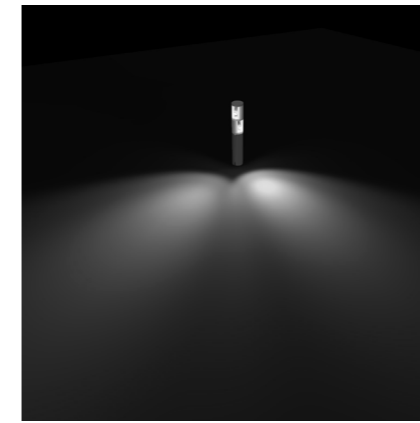

36 degree

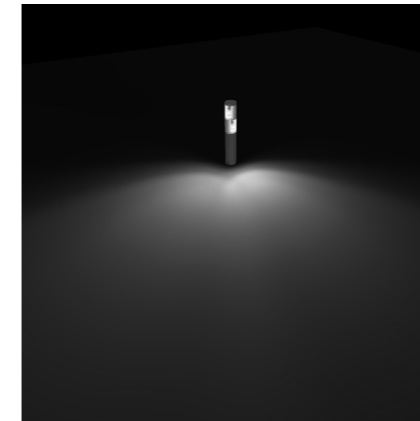

60 degree




Available in Black colour



Available in Corten colour



Available in Silver colour

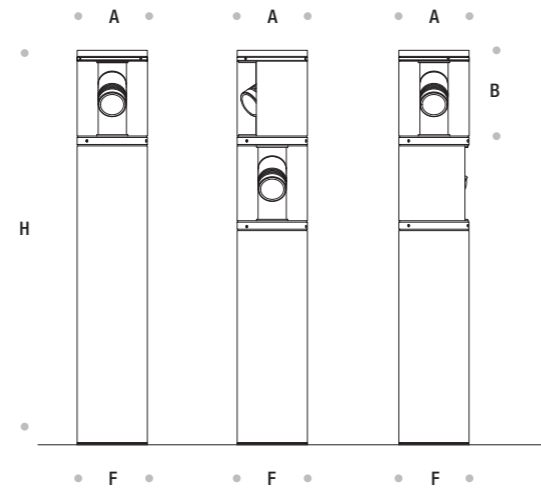

iVoli						
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)	F (mm)
LB2757	1 x 12W	3000K / 4000K	150	180	800 - 1200	150
LB2758	2 x 12W	3000K / 4000K	150	180	800 - 1200	150

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. BSIEN® LED Module.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

