

Light Columns

Light column series with minimal and robust design in different heights, ideal for ambient illumination of squares, avenues, paths, parks, walkways and gardens. Directed beam technology with innovative optical modules developed for iFlute guarantees visual comfort, safety and improved quality of space.



Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Elegant and Attractive

Elegant light column with clear lines and directed beam provide high visual comfort and glare control. The modular luminaires, based on elegant design aluminium profile and housing, offer various aesthetic and performance solutions. For all its diversity and flexibility, iFlute with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultramodern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version. The product is supplied prewired, permitting simple, rapid and safe installation.

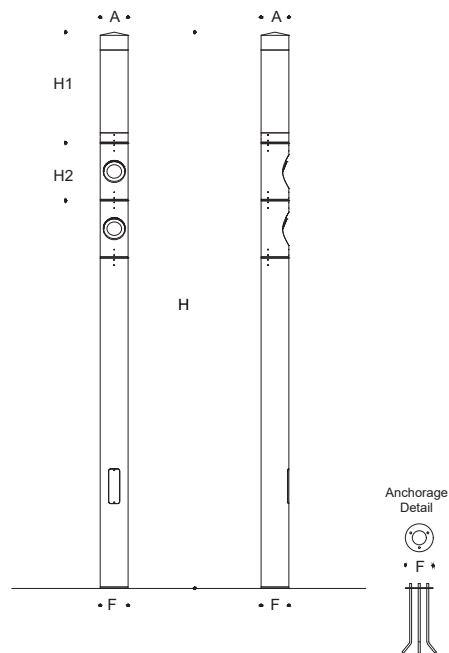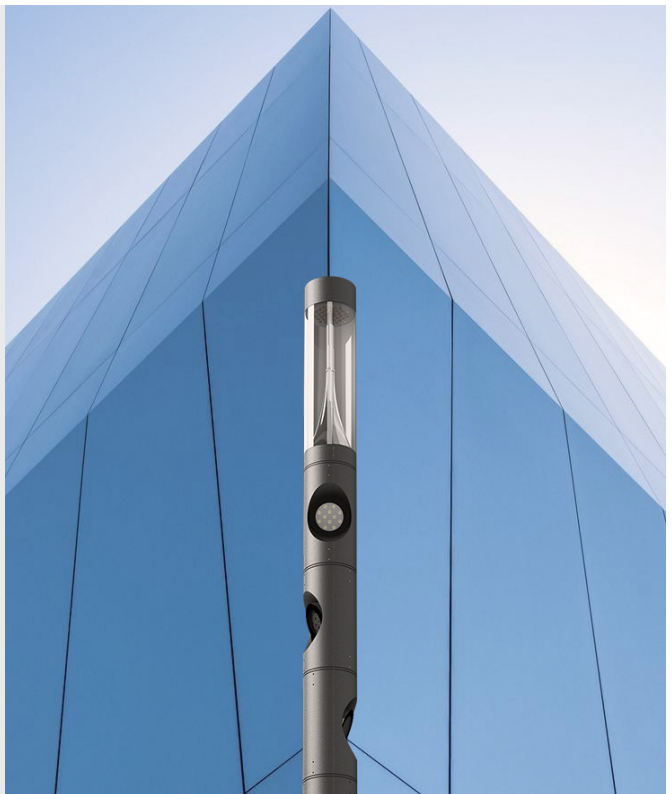

iFlute Plus						
Codes	Power	A (mm)	H1 (mm)	H2 (mm)	F (mm)	H (mm)
LB571605	48W	200	795	415	200	4000

* Wattages and modules can be customized.


iFlute Plus




For detailed information about the iFlute Plus



45 degree

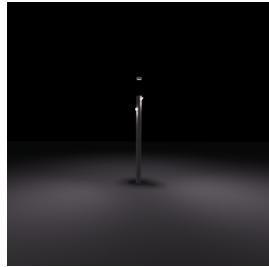


60 degree

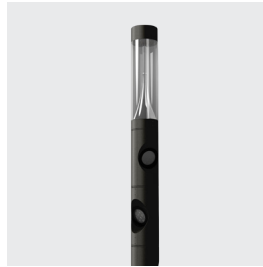


Available in Black colour



90 degree

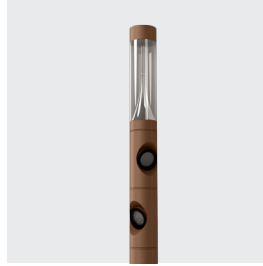

Available in Corten colour



Available in Silver colour



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Customizable rotatable modules. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems DMX / RDM, Wifi, Bluetooth, DALI, Nema / Zhaga Socket

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.