

Light Columns

Bollard and light column series with minimal and robust design in different heights, ideal for glare-free lighting of squares, avenues, paths, parks, walkways and gardens. The innovative optical systems developed for iRuta LE Decor guarantee visual comfort, safety and improved quality of space.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Individual and Functional

The iRuta LE Decor collection is characterized by clean, pure and minimal lines that soberly articulate in space, while responding to a modular and flexible design. The columns are illuminated from the inside and light up the streets at night, while making a statement during the day.

iRuta LE Decor uses high-precision laser cut patterns and improved aluminium reflectors with individual options.


The possibility to use various lighting distribution with optional mounting heights allows designers to illuminate differing urban spaces with original system configurations.

Modern Design and Easy to Install

Modern design adapted to the requirements and conditions of the client and project (logo, emblem or any pattern adjusted to surrounding).

The luminaire is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.

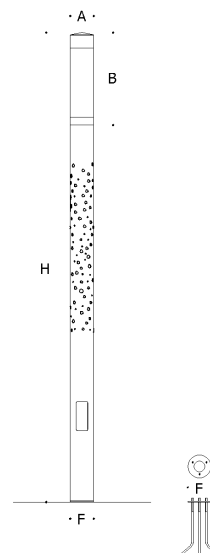

iRuta LE Decor


Codes	Power	Colour Temperature	A (mm)	B (mm)	F (mm)	H (mm)
LB1176	41W	3000K / 4000K	200	790	200	4000

* Wattages and modules can be customized.

iRuta LE Decor



For detailed information about the iRuta LE Decor




45 degree



60 degree



Available in Black colour




90 degree



Asymmetric M3



Available in Corten colour



M3



Available in Silver colour



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Customizable patterns modules. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK10

Insulation Class I

Complies with EN60598 and relevant standards.