



Key Features

iClax is a high output LED floodlight with perfect beam control.

Ideally suited as a spotlight for accent light from a large distance or as a floodlight for the illumination of large building facades and sculptures.

Designed to last in extremely harsh environments.


Intelligent BSIDW® Dynamic Tunable White grazing, DMX / RDM controllable, easy to install with the integrated universal power supply and connect via combined power and data connectors.



Key Data

LED Type	Intelligent BSIDW® Dynamic Tunable White 2700K - 4000K - 5000K - 6500K, 3-step MacAdams ellipse and LM80 compliant.
Nominal Voltage	220V-240V AC, 50/60Hz
Color Rendering Index	CRI ≥ 80 standard and CRI ≥ 90 on request.
Optics	18° x 38°
Materials	Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Mounting bracket made of steel with polyester powder coating.
Optional Coating	Marine grade.
Diffuser	High impact and heat resistant polycarbonate with UV protection.
LED Life Time	L90 - B10 > 100,000h
Operating Temperature	-40°C / +55°C
Power Factor	>0.95
Control Systems	DMX / RDM (External).
Protection Class	IP66
Impact Resistance	IK09
Insulation Class	Class I
Conformity	Complies with European Standards EN 60598 and CE certified.


Technical Drawing

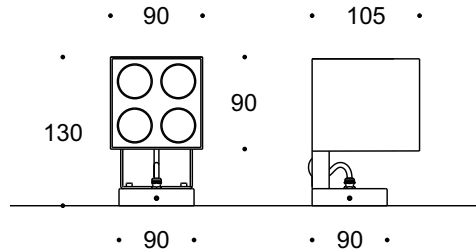

Information

CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm) 4000K	COLOUR TEMPERATURE
FL9180 DYNAMIC	8W	1136	Dynamic White

Light Distribution Curve



18° x 38°

Accessories



Glare Shield
Code: GS9171



IP68 Plug Power Connector Set (Two Pieces)
Code: CON1202