

In-Ground

A real dialogue between illumination and the environment. Architectural in-ground stainless steel LED recessed range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

High Impact and Versatile


Innovative light sources and precise optical systems combine to form a high impact and low maintenance product.

iNoxi Nano is a compact and high performance uplight luminaire with impressive versatility. Suitable for easy installation on walkways, promenades and squares. Ideal for lighting building facades and other architectural elements.


Integrated Solution and Easy to Install

Plug and play built-in system with the fully integrated universal power supply unit.


The watertight plug connector ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

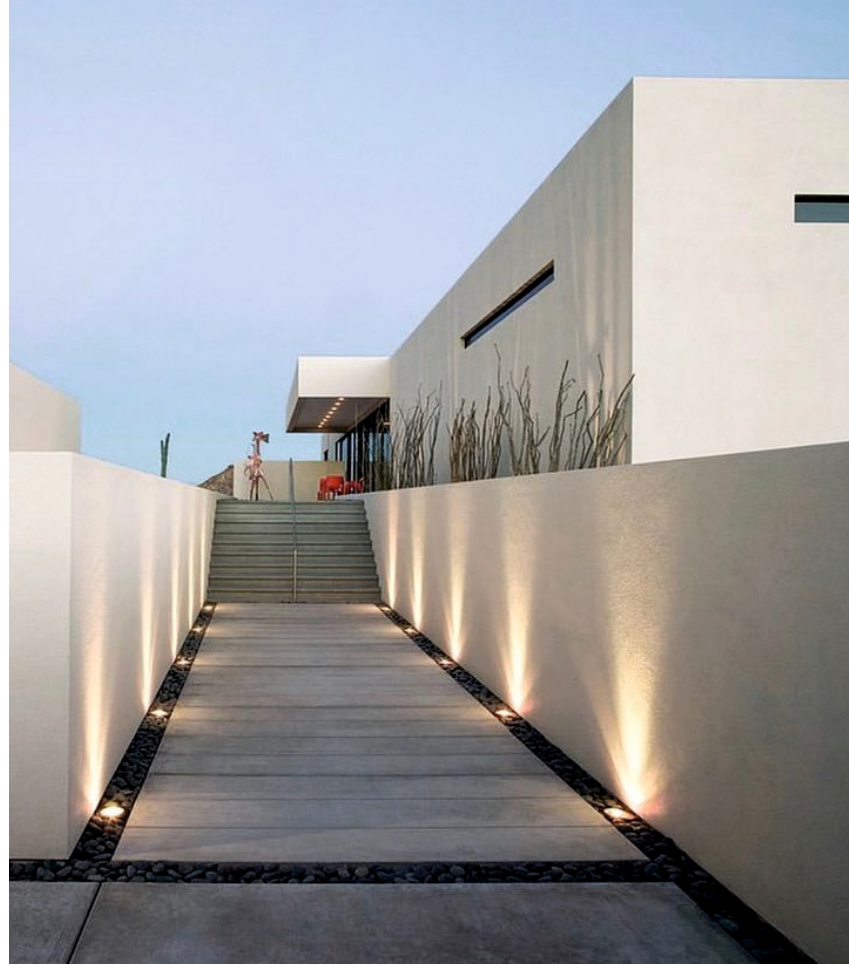


10x60 degree




12 degree




18x38 degree




30 degree




45 degree



60 degree



90 degree



iNoxi Nano				
Codes	Power	Colour Temperature	A (mm)	B (mm)
AC82022	4W	3000K / 4000K	85	85

Technical Features

Corrosion resistant aluminium housing with stainless steel screws (A4 grade) and temperature-resistant silicone gaskets. Power unit is built in. Includes recessing box and stainless steel frame. Sealed cable gland. 20° tilt and 355° rotatable.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface (External)

Protection Class IP67

Impact Resistance IK10

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iNoxi Nano