



Key Features

Sword media facade line enables an endless layout of patterns, graphics display and offers customizable solutions pixel mapping with DMX 512 and RDM protocol.

Encapsulated linear pixel luminaires designed to highlight the exceptional character of large-scale architectural structures and spaces such as skyscrapers, stadiums, theme parks, bridges, airports, and shopping malls.


Sword PX video pixel linear engineered to provide powerful pixel mapping and media effects.



Key Data

LED Type	High efficiency LEDs color temperatures ranging from 2700 K to 6500K, 3-step MacAdams ellipse and LM80 compliant. Each temperature (2700K-6500K) can be controlled individually.
Nominal Voltage	48V DC
Maximum in Chain	Max 20 meters or 32 pieces (Varies by selected DMX)
Color Range	White CCT 2700-6500K
Color Rendering Index	CRI ≥ 80 standard and CRI ≥ 90 on request.
Color Resolution	3x12-bit (Gamma correction)
Light Distribution	120°
Materials	Corrosion resistant extruded anodized aluminium housing with stainlesssteel screws and silicone rubber gaskets. Back connection via XLR connectors and no gaps between two products. Includes adjustable mounting brackets. Confirms vibration standards for bridge applications.
Addressing	RDM (Group of Remote Addressable Systems)
Monitoring	Voltage Monitoring, Temperature Monitoring, Status Monitoring, Power Cycle Monitoring, Lumen-Maintenance Life Monitoring.
Pixel Pitch	Pixel pitch is configurable via RDM, max 40pixel/m
Optional Coating	Marine grade.
Diffuser	High impact and heat resistant polycarbonate with UV protection.
LED Life Time	L90 - B10 > 100,000h
Operating Temperature	-40°C / +55°C
Power Factor	>0.95
Control Systems	DMX: USITT DMX512-1990 / RDM: ANSI/ESTA E1.20-2010
Protection Class	IP67
Impact Resistance	IK10
Insulation Class	Class II
Conformity	Complies with European Standards EN 60598 and CE certified.


Technical Drawing

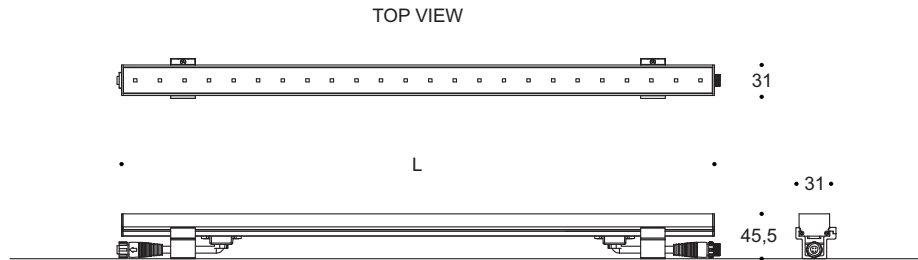

Information

PRODUCT	LENGHT (mm)	POWER CONSUMPTION	LUMEN OUTPUT (lm) (2700-6500K)	COLOUR TEMPERATURE
AR106811 DIRECT / 300	300	15 W Full On	560 lm/m	White CCT 2700-6500K
AR106811 DIRECT / 600	600	15 W Full On	560 lm/m	White CCT 2700-6500K
AR106811 DIRECT / 900	900	15 W Full On	560 lm/m	White CCT 2700-6500K
AR106811 DIRECT / 1200	1200	15 W Full On	560 lm/m	White CCT 2700-6500K

Light Distribution Curve



120°