

Key Features


iLevel is a dimmable encapsulated linear LED line, suited for installation in indoor and outdoor with a broad range of colours. It is a colour mixing linear light source in a compact, IP rated, silicone sealed aluminium profile with mounting brackets. Available in lengths to suit your application and provides a concealed, continuous linear glare and dot free illumination for discrete architectural details and accent lines. Designed to last in extremely harsh environments.



Key Data

| | |
|------------------------------|---|
| LED Type | High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. |
| Nominal Voltage | 24V DC |
| Color Rendering Index | CRI ≥ 80 standard and CRI ≥ 90 on request. |
| Optics | 120° |
| Materials | Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Operates with a remote driver. Includes waterproof connectors. BSILINEA® LED Module. |
| Optional Coating | Marine grade. |
| Diffuser | Shockproof PMMA UV Stabilised Diffuser. |
| LED Life Time | L90 - B10 > 100,000h |
| Operating Temperature | -40°C / +55°C |
| Power Factor | >0.95 |
| Control Systems | 1-10V DIM, DALI Interface. |
| Protection Class | IP67 |
| Impact Resistance | IK08 |
| Insulation Class | Class III |
| Conformity | Complies with European Standards EN 60598 and CE certified. |


Technical Drawing

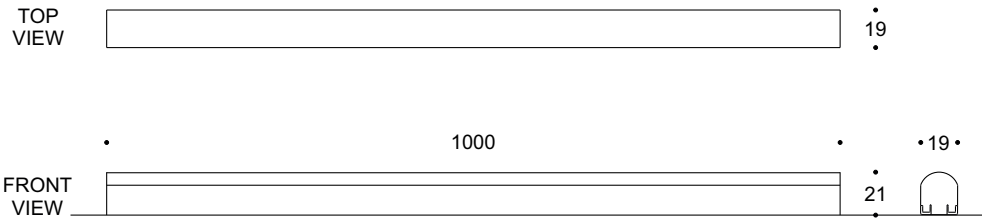


Information

| CODE | LENGTH (mm) | POWER CONSUMPTION | LUMEN OUTPUT (lm) 3000K / 4000K |
|--------|-------------|--------------------|---------------------------------|
| AR6072 | 1000 | 10 / 14 / 16 / 18W | 1350 / 1530 |


Light Distribution Curve



Accessories



Adjustable Bracket
Code: AB6001



Fixed Bracket
Code: FB7001



Long Bracket
Code: FN8001



Transparent Connector
Code: TC1203



End Cap
Code: EC1001