



Key Features

iLevel Pendant stands as the perfect lighting solution for various settings.

It adds a touch of style and pleasant illumination, enhancing environments with a modern and elegant design.

Architectural ceiling lighting range inspires architects, designers and system integrators with its exceptional quality, homogenous beam angles and remarkable creativity.


Designed to last in extremely harsh environments.



Key Data

LED Type	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant.
Nominal Voltage	24V DC
Color Rendering Index	CRI ≥ 80 standard and CRI ≥ 90 on request.
Optics	120°
Materials	Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Operates with a remote driver. Includes waterproof connectors. BSILINEA® LED Module.
Optional Coating	Marine grade.
Diffuser	Shockproof PMMA UV Stabilised Diffuser.
LED Life Time	L90 - B10 > 100,000h
Operating Temperature	-40°C / +55°C
Power Factor	>0.95
Control Systems	On-Off, 1-10V DIM, DALI Interface.
Protection Class	IP67
Impact Resistance	IK08
Insulation Class	Class III
Conformity	Complies with European Standards EN 60598 and CE certified.

Technical Drawing

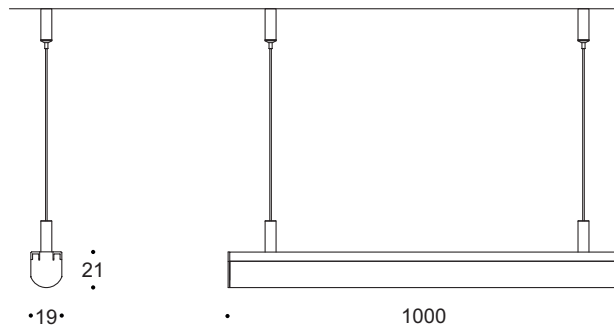


Information

CODE	LENGTH (mm)	POWER CONSUMPTION	LUMEN OUTPUT (lm) 3000K / 4000K
IC6072	1000	10 / 14 / 16 / 18W	1350 / 1530

* Rated lumen output 18W per meter.

Light Distribution Curve



120°

Accessories



Transparent Connector
Code: TC1203



End Cap
Code: EC1001