

Key Features

iEnna stands as the perfect lighting solution for various settings.

It adds a touch of style and pleasant illumination, enhancing environments with a modern and elegant design.

Architectural ceiling lighting range inspires architects, designers and system integrators with its exceptional quality, homogenous beam angles and remarkable creativity.


Designed to last in extremely harsh environments.



Key Data

LED Type	High efficiency LEDs, available in 2700K, 3000K, 4000K, 5000K, 6500K CCT tolerance within a 3-step MacAdams ellipse and LM80 compliant. Custom LED color combinations available.
Nominal Voltage	220V-240V AC, 50/60Hz
Color Rendering Index	CRI ≥ 80 standard and CRI ≥ 90 on request.
Optics	120°
Materials	Corrosion resistant double layer polyester powder coated paint finish extruded aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. BSITECH® LED Module.
Optional Coating	Marine grade.
Diffuser	High impact and heat resistant polycarbonate with UV protection.
LED Life Time	L90 - B10 > 100,000h
Operating Temperature	-40°C / +55°C
Power Factor	>0.95
Control Systems	On - Off, 1-10V DIM, DALI Interface.
Protection Class	IP54
Impact Resistance	IK08
Insulation Class	Class I
Installation	Ceiling surface mounted.
Conformity	Complies with European Standards EN 60598 and CE certified.


Technical Drawing



Information

CODE	POWER CONSUMPTION	LUMEN OUTPUT (lm) 3000K / 4000K	COLOUR TEMPERATURE
IC6306	54W	5940 / 6480	3000K / 4000K

Light Distribution Curve

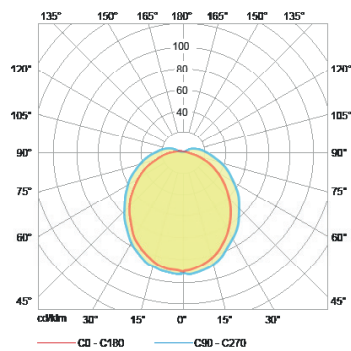

Diffused Beam