



Linear Surface

Minimalistic linear luminaires suitable for facade or wall and ceiling direct view applications.

Architectural LED linear range inspires architects, designers and system integrators with its exceptional quality, homogeneous light output and remarkable creativity.

Robust and Compact


High protection against vandalism thanks to a robust, anodized aluminium housing with high a mechanical impact rating.

Exceptional performance and compact dot-free, homogeneous light emission surface with impressive versatility.



Slim Design and Easy to Install

The slim luminaire, which is equipped with an external power supply unit, is optionally available with DMX or DALI control or in the user-friendly On-Off version.

The watertight connector system ensures easy, fast and secure installation. The robust luminaire fits seamlessly into the architecture.

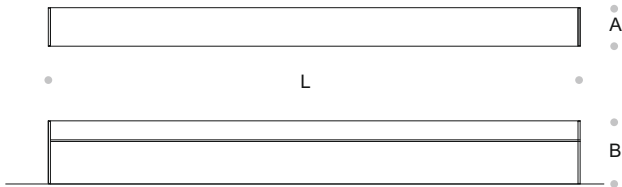


10 / 14 W

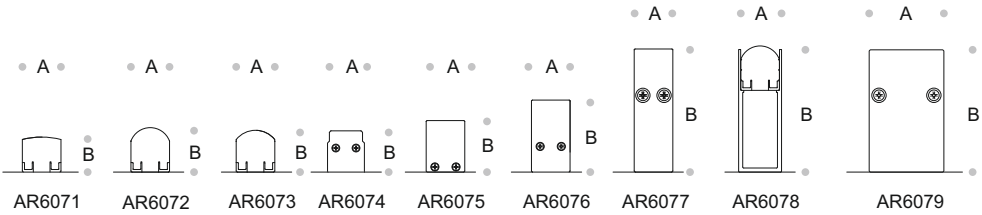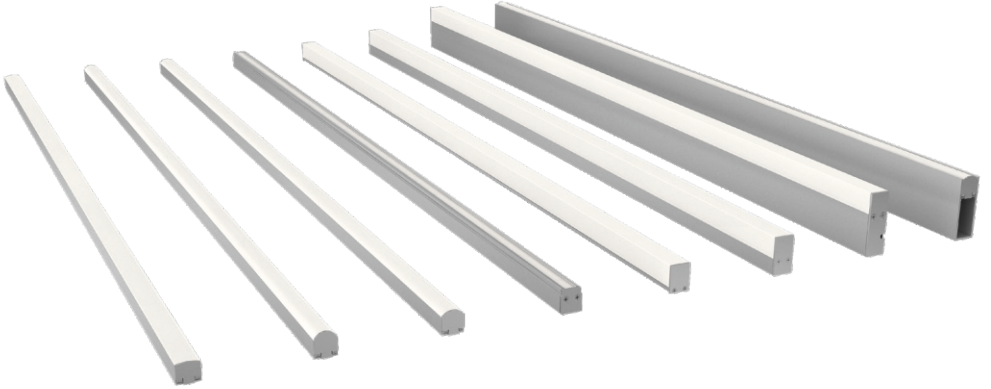

iLevel				
Codes	Power	A (mm)	B (mm)	L (mm)
AR6071	10 / 14 W	19	17	1000
AR6072	10 / 14 W	19	21	1000
AR6073	10 / 14 W	19	20	1000
AR6074	10 / 14 W	19	21	1000
AR6075	10 / 14 W	19	25	1000
AR6076	10 / 14 W	19	35	1000
AR6077	10 / 14 W	19	60	1000
AR6078	10 / 14 W	22	60	1000
AR6079	18 / 26 / 30 / 36 W	36	60	1000

*Rated Lumen Output 18W per meter.

Technical Features
Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. Operates with a remote driver. Includes waterproof connectors and mounting bracket. BSILINEA® LED Module.
LED MacAdam Step 3
Nominal Voltage 24V DC
Operating Temperature -40°C / +55°C
Control Systems 1-10V DIM, DMX / RDM, DALI Interface (External)
Protection Class IP67
Impact Resistance IK08
Insulation Class III
Complies with EN60598 and relevant standards.

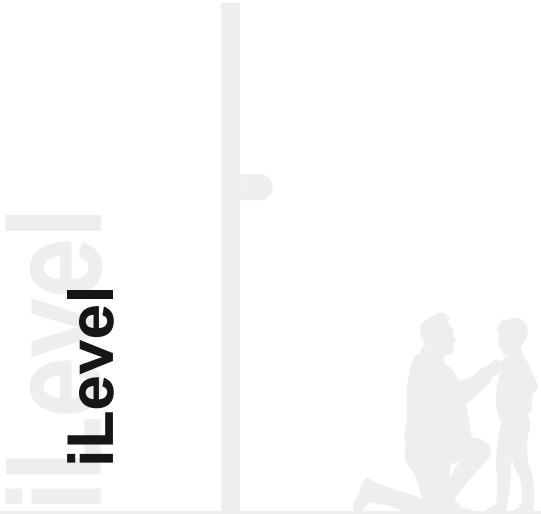

For detailed information about the iLevel