

Light Columns


iOtto Pro is a modern lighting column designed for parks, walkways, residential landscapes and urban outdoor environments. Its transparent cylindrical body provides uniform 360° light distribution, ensuring balanced and comfortable illumination. Equipped with high-efficiency LED technology and an optimized thermal structure, it guarantees reliable and long-lasting performance.

Modular and Attractive

Durable construction and high-quality materials ensure resistance against various outdoor conditions. The luminaire maintains both performance stability and aesthetic appearance over time.

Solid Design and Easy to Install


The lighting column offers a soft ambient illumination that enhances spatial perception and safety in outdoor environments. Its refined light distribution creates a welcoming and visually pleasing atmosphere.

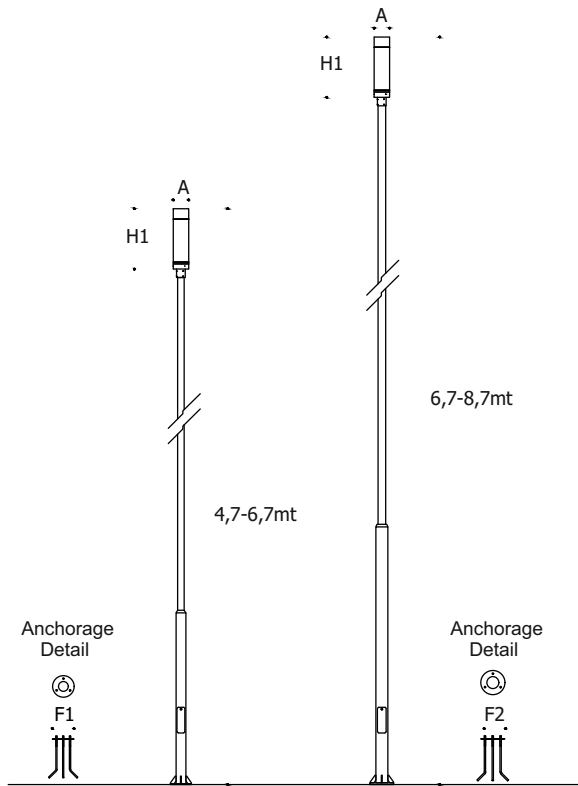

iOtto Pro						
Codes	Power	Colour Temperature	A (mm)	H (mm)	H1 (mm)	F1/F2 (mm)
LB5668	33-54W	3000K / 4000K	180	4700 - 8700	700	250/280



For detailed information about the iOtto Pro

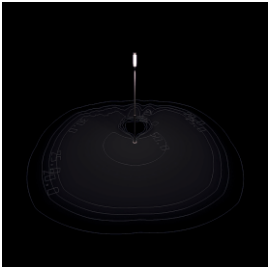


90 degree



Available in Black colour




IESNA Type IV




Available in Corten colour



IESNA Type V

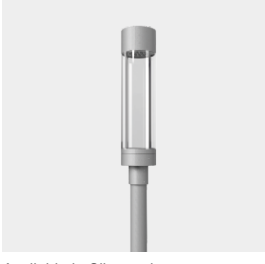

Available in Silver colour

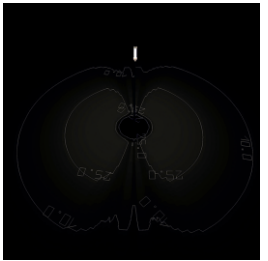

Pedestrian Walkways



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.