

Light Columns

iRuta Decor Plus is an architectural lighting structure with a square cross section creates an impressive alternation of light and shadow on the floor. Top luminaire installation responds to the specifc functional and architectural requirements of each urban context. Effcient tool for lighting open spaces, pedestrian areas and urban zones.

Architectural LED lighting column range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.

Modular and Flexible


The iRuta collection is characterized by clean, pure and minimal lines that soberly articulate in space, while responding to a modular and fexible design.

The luminaire with stylized appearance and with improvements in installation, maintenance and service life offers a wide variety of light distributions that ensure effective values, visual comfort and light output for pedestrian areas without light pollution. The possibility to use various photometric distribution with optional mounting heights allows designers to illuminate differing urban spaces with original system configurations.


Modern Design and Easy to Install

Modern design adapted to the requirements and conditions of the client and project (company logo, city emblem or any pattern adjusted to surrounding). The luminaire is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version. The columns can be illuminated from the inside by an independent light source, so that even at night the column is an interesting feature in the landscape.

The product is supplied pre-wired, permitting simple, rapid and safe installation.




40 degree




60 degree



Available in Black colour




90 degree




IESNA Type IV



Available in Corten colour





IESNA Type V (square)



Pedestrian Walkways



Available in Silver colour

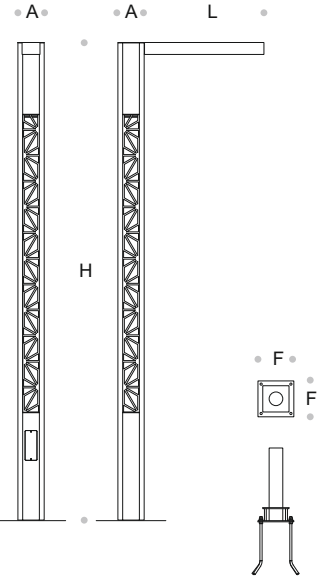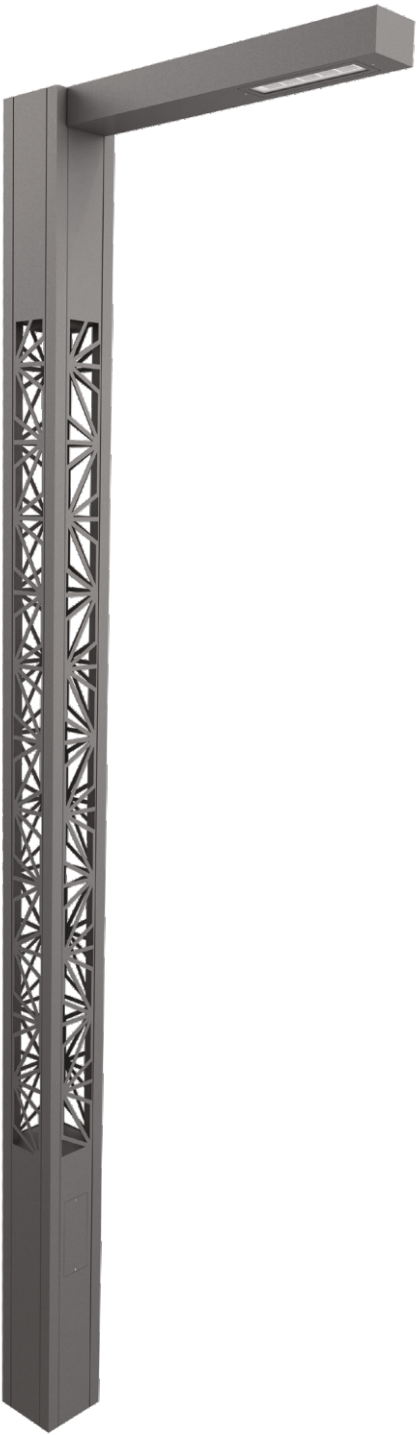

iRuta Decor Plus						
Codes	Power	Colour Temperature	A (mm)	L (mm)	H (mm)	F (mm)
LB1367	54W	3000K / 4000K	220	900	4000	300
LB1368	72W	3000K / 4000K	220	900	6000	300

*Integrated Pole LED Module Power: 27W Standard

Technical Features

Corrosion resistant double layer polyester powder coated paint fnish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard fnish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iRuta Decor Plus