

iCubus series provide an elegant solution for lighting various environments in towns and cities such as urban and residential streets, squares, parks, pedestrian areas and car parks. Functional LED outdoor pole mounted luminaire, with wide range of beams, sizes and powers, ideal for residential, urban and landscape lighting.

iCubus offers a wide range of options for realizing impressive and efficient lighting concepts and individual design solutions within urban spaces. Architectural foodlight range inspires architects, designers and system integrators with its exceptional quality, a variety of beam angles and remarkable creativity.


Versatile and Creative

Urban foodlights create a simple and versatile base for cities and streetscapes to extend their beauty, safety and functionality beyond daylight. The iCubus adjustable urban foodlights complement each other with accessories that allow installation on a pole, available with a wide range of arms and pole types for customized configurations.

The combination of foodlights with different optics makes creative lighting scenarios possible. With pole heights of up to 12meter, various arms and the ability to place various lighting points in differing heights, provide a great deal of creative freedom.


Integrated Solution and Modern Design

Plug and play built-in system with the fully integrated universal power supply unit. The entire family appears in a uniform and durable modern design. A wide range of attractive accessories; honeycomb louvre, glare shield, as well as wide selection of mounting arms.

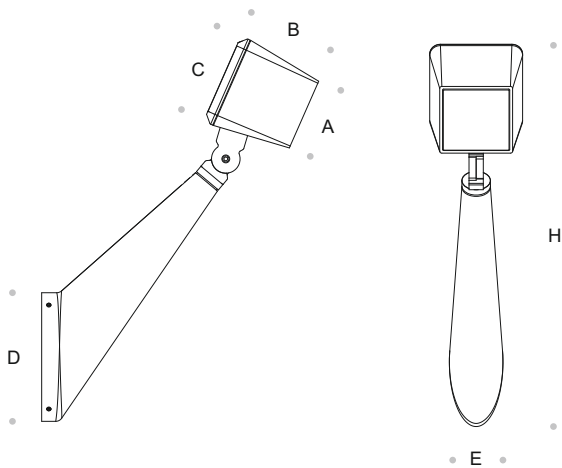


iCubus Flow								
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	H (mm)
UA17111	48W	3000K / 4000K	160	185	190	180	75	525
UA17112	72W	3000K / 4000K	200	235	240	180	75	573
UA17113	108W	3000K / 4000K	200	235	240	180	75	573
UA17114	144W	3000K / 4000K	200	235	240	180	75	573

*Poles to be ordered separately. See tables on pages 470 - 475.

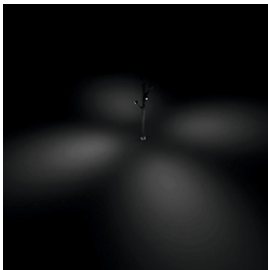

40 degree




60 degree



Available in Black colour




90 degree




IESNA Type II



Available in Corten colour



IESNA Type III (medium)




IESNA Type IV



Available in Silver colour



IESNA Type V (square)



Pedestrian Walkways



Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour. Adjustable mounting bracket made of aluminium with polyester powder coating. Conical poles are in galvanized steel or aluminium, available in different heights from 4m to 10m.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP66

Impact Resistance IK09

Insulation Class I

Complies with EN60598 and relevant standards.



For detailed information about the iCubus Flow