



Light Columns


Bollard and light column series with minimal and robust design in different heights, ideal for glare-free lighting of squares, avenues, paths, parks, walkways and gardens. The innovative optical systems developed for iLia guarantee visual comfort, safety and improved quality of space. Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Smooth and Functional


Smooth, round, decorative bollard and light column with high lighting efficiency and uniform light emission. The various modes of installation and the orientability of the product respond to specific functional and architectural requirements of every urban context. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version. The product is supplied pre-wired, permitting simple, rapid and safe installation.

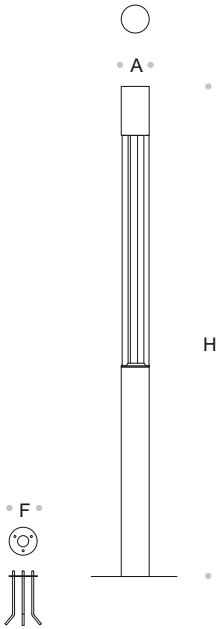


iLia					
Codes	Power	Colour Temperature	A (mm)	H (mm)	F (mm)
LB1356	38W	3000K / 4000K	200	3000	200
LB1358	54W	3000K / 4000K	200	4000	200



45 degree




60 degree



Available in Black colour




90 degree



IESNA Type IV



Available in Corten colour



IESNA Type V (square)



Pedestrian Walkways



Available in Silver colour



Technical Features

- Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.
- LED MacAdam Step 3
- Nominal Voltage 220V-240V AC, 50/60Hz
- Operating Temperature -40°C / +55°C
- Control Systems 1-10V DIM, DALI Interface
- Protection Class IP65
- Impact Resistance IK08
- Insulation Class I
- Complies with EN60598 and relevant standards.

