



Light Columns


Bollard and light column series with minimal and robust design in different heights, ideal for glare-free lighting of squares, avenues, paths, parks, walkways and gardens. The innovative optical systems developed for iLia guarantee visual comfort, safety and improved quality of space. Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional light distribution and remarkable creativity.

Smooth and Functional

Smooth, round, decorative bollard and light column with high lighting efficiency and uniform light emission. In combination with an extruded aluminium pole and a transparent or opal polycarbonate diffuser with impact resistance and UV protection. The various modes of installation and the orientability of the product respond to specific functional and architectural requirements of every urban context. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install


The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version. The product is supplied pre-wired, permitting simple, rapid and safe installation.

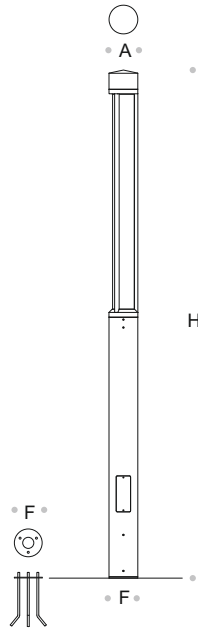


iLia Soft					
Codes	Power	Colour Temperature	A (mm)	H (mm)	F (mm)
LB1372	48W	3000K / 4000K	200	3500	200
LB1374	56W	3000K / 4000K	200	4500	200
LB1376	65W	3000K / 4000K	200	6000	200



45 degree




60 degree




Available in Black colour




90 degree




IESNA Type IV



Available in Corten colour




IESNA Type V (square)



Pedestrian Walkways




Available in Silver colour



Technical Features

- Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.
- LED MacAdam Step 3
- Nominal Voltage 220V-240V AC, 50/60Hz
- Operating Temperature -40°C / +55°C
- Control Systems 1-10V DIM, DALI Interface
- Protection Class IP65
- Impact Resistance IK10
- Insulation Class I
- Complies with EN60598 and relevant standards.

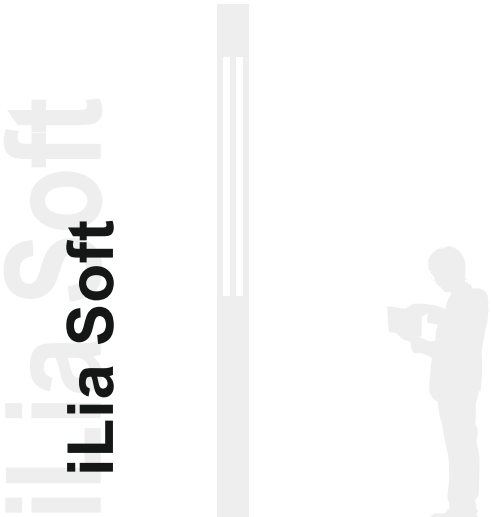

For detailed information about the iLia Soft