

Light Columns

iLoft is a family of robust and high-quality construction light elements, designed on the basis of rectangular shapes. Offers LED technology solutions for the lighting of pathways and urban areas. The innovative optical systems designed for the iLoft line guarantee visual comfort, safety and enhanced quality of space.

Architectural LED light column and bollard range inspires architects, designers and system integrators with its exceptional quality, adjustable light distribution and remarkable creativity.

Modular and Functional

Efficient design that features tremendous modularity and ease of use. iLoft is made of extruded aluminum, resulting in a form with simplicity matches its function.

The various modes of installation and the orientability of the product respond to specific functional and architectural requirements of every urban context. The possibility to use various photometric distribution with optional mounting heights allows designers to illuminate differing urban spaces with original system configurations.


Integrated Solution and Easy to Install

The iconic luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.

The product is supplied pre-wired, permitting simple, rapid and safe installation.




60 degree




90 degree



Available in Black colour




IESNA Type II




IESNA Type III (medium)



Available in Corten colour




IESNA Type IV




IESNA Type V (square)



Available in Silver colour



Pedestrian Walkways

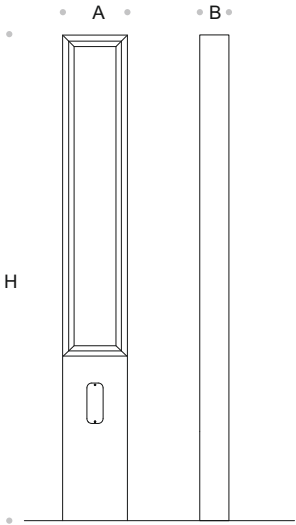

iLoft					
Codes	Power	Colour Temperature	A (mm)	B (mm)	H (mm)
LB1482	27W	3000K / 4000K	300	140	3000
LB1484	41W	3000K / 4000K	350	140	3500
LB1486	54W	3000K / 4000K	400	140	4000

Technical Features

Corrosion resistant double layer polyester powder coated paint finish die cast aluminium housing, aluminium extruded column (EN AW-6060) with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C



Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

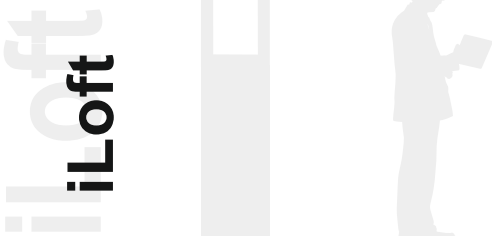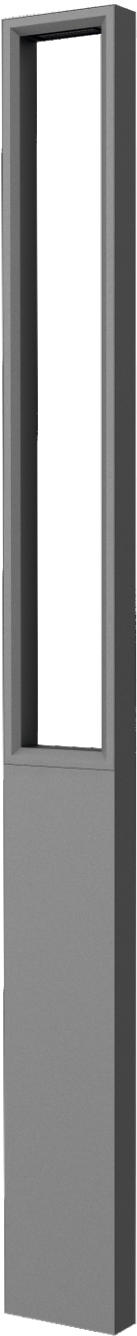

For detailed information about the iLoft