

The system enables area, sports, architectural and dimensional lighting to be implemented with high effciency, and with maximum demands in terms of quality of light, functionality, design and individual needs. The family design has been uniformly implemented across all construction sizes.

The range have identical proportions, the same high quality of materials and appearance. Photometrically, they all feature the LED platform with precise light control and glare-minimised optics, for maximum quality of lighting and fnest visual comfort.

Refned and Elegant

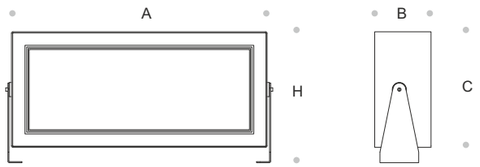
The iPlasma series offer refned foodlighting with high-quality fnish and appearance. The three versions provide a high degree of fexibility with high performance optics and precise adjustments through brackets. Compact and elegant, the luminaire is designed with no visible screws on the front of the frame to maintain the aesthetics.

The combination of foodlights with different optics makes creative lighting scenarios possible.

Integrated Solution and Elegant Design

Plug and play built-in system with the fully integrated universal power supply unit.

The entire family appears in a uniform and durable modern design. Thanks to the plug connectors, connections can be made without any special tools.





iPlasma REC

iPlasma REC						
Codes	Power	Colour Temperature	A (mm)	B (mm)	C (mm)	H (mm)
FL92121/S	54W	3000K / 4000K	330	130	223	260
FL92122/S	72W	3000K / 4000K	330	130	223	260
FL92141/M	108W	3000K / 4000K	536	160	296	356
FL92142/M	144W	3000K / 4000K	536	160	296	356
FL92143/M	172W	3000K / 4000K	536	160	296	356
FL92161/L	256W	3000K / 4000K	746	160	328	378
FL92162/L	384W	3000K / 4000K	746	160	328	378
FL92181/S	96W	RGB / RGBW	330	130	223	260
FL92182/M	216W	RGB / RGBW	536	160	296	356
FL92183/L	384W	RGB / RGBW	746	160	328	378


For detailed information about the iPlasma REC


bsi
bsilighting.com


10x60 degree



12 degree



Available in Black colour


25x50 degree



30 degree



Available in Corten colour



40 degree


45 degree


Available in Silver colour


60 degree


90 degree


M3 degree









Technical Features
Corrosion resistant double layer polyester powder coated paint fnish die cast aluminium housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard fnish or any desired RAL colour. Adjustable mounting bracket made of aluminium with polyester powder coating.
LED MacAdam Step 3
Nominal Voltage 220V-240V AC, 50/60Hz
Operating Temperature -40°C / +55°C
Control Systems 1-10V DIM, DMX / RDM, DALI Interface
Protection Class IP66
Impact Resistance IK09
Insulation Class I
Complies with EN60598 and relevant standards.