



PRODUCT FEATURES:

iMetis is a functional LED lighting solution for exterior lighting applications. By using the same lighting platform and incorporating a new and unique BSISQ® LED Module; the luminaire achieves the required illumination levels and distribution in pedestrian, site, roadway environments.

Designed to last in extremely harsh environments.


RECOMMENDATIONS FOR THE USER:

- 1) Before the installation, make sure that there is no voltage.
- 2) Do not touch the fitting when it is working on / switched on
- 3) Do not look at the fitting directly or from a short distance.
- 4) Disconnect / switch off the fitting before changing the lamps


NOTES:

- Technical amendments are reserved.
- CE – Conformity mark
- The manufacturer is then discharged from liability when damage is caused by improper use or installation.
- Clean luminaire regularly with solvent-free cleansers from dirt and deposits. Do not use high pressure cleaners.


- 1) - The gijons are screwed into the anchor.
 - The prepared anchorage is embedded in the concrete.

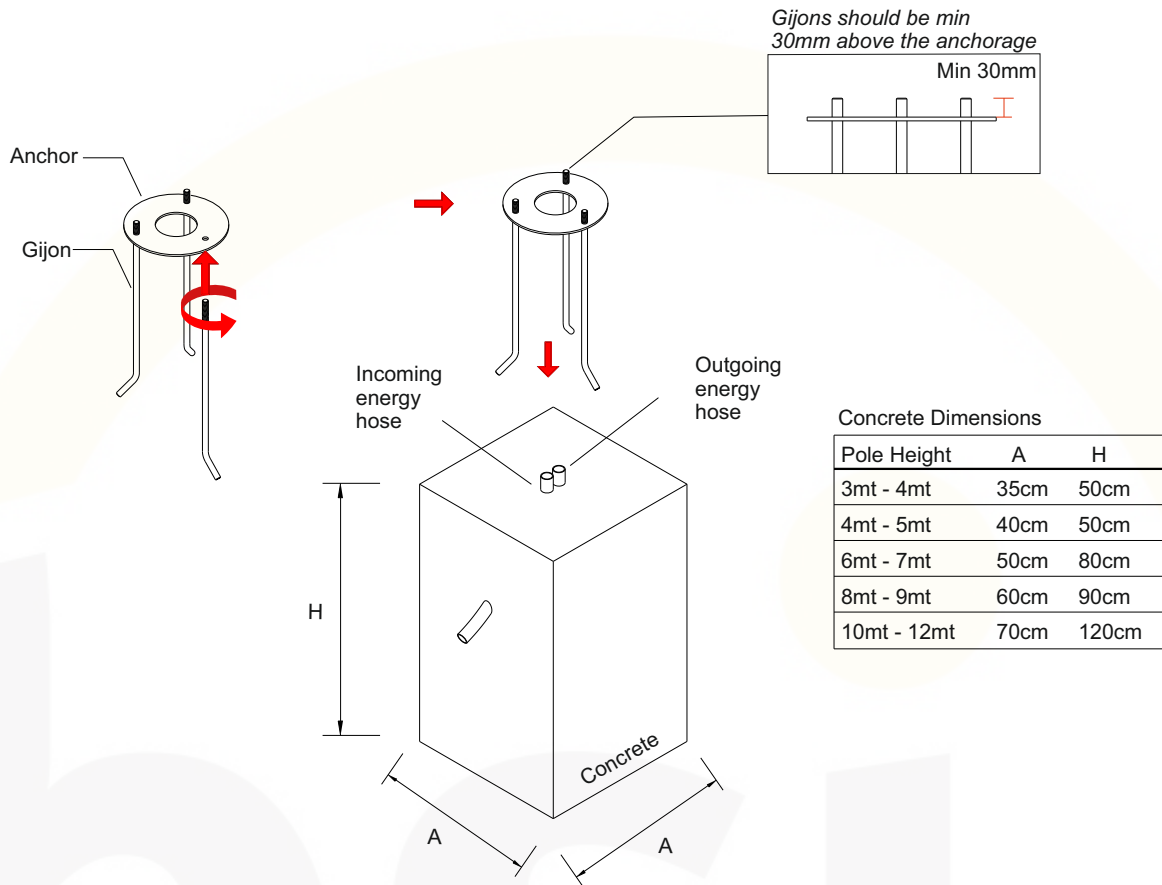

- 2) After the concrete has been dried, the electrical cables are pulled and the nuts are removed.

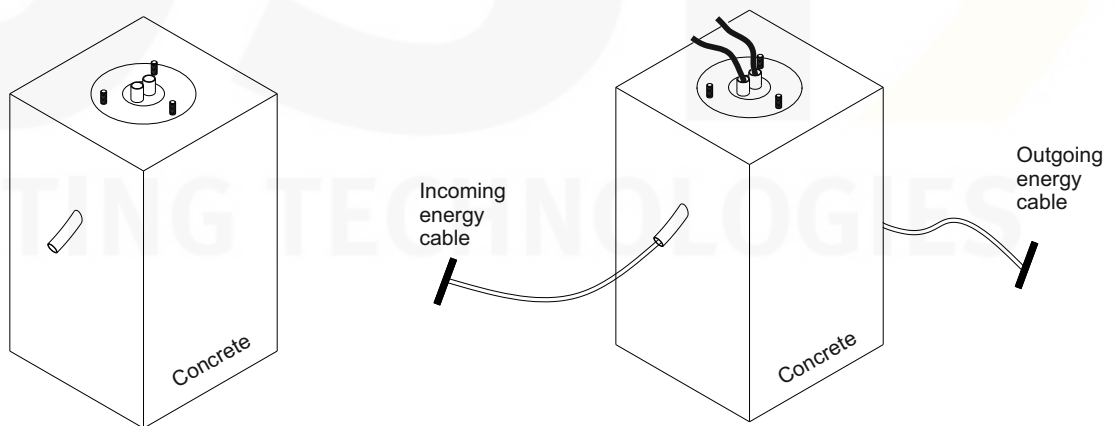

- 3) - The joint is screwed into the pole and fuse cover is removed from the pole.
- Pass the power cable through the cable hole of the pole and remove it from the fuse cover.
 - Tighten the luminaire to the joint with screws.
 - The luminaire is brought to the desired angle and the screws of the joint are tightened.

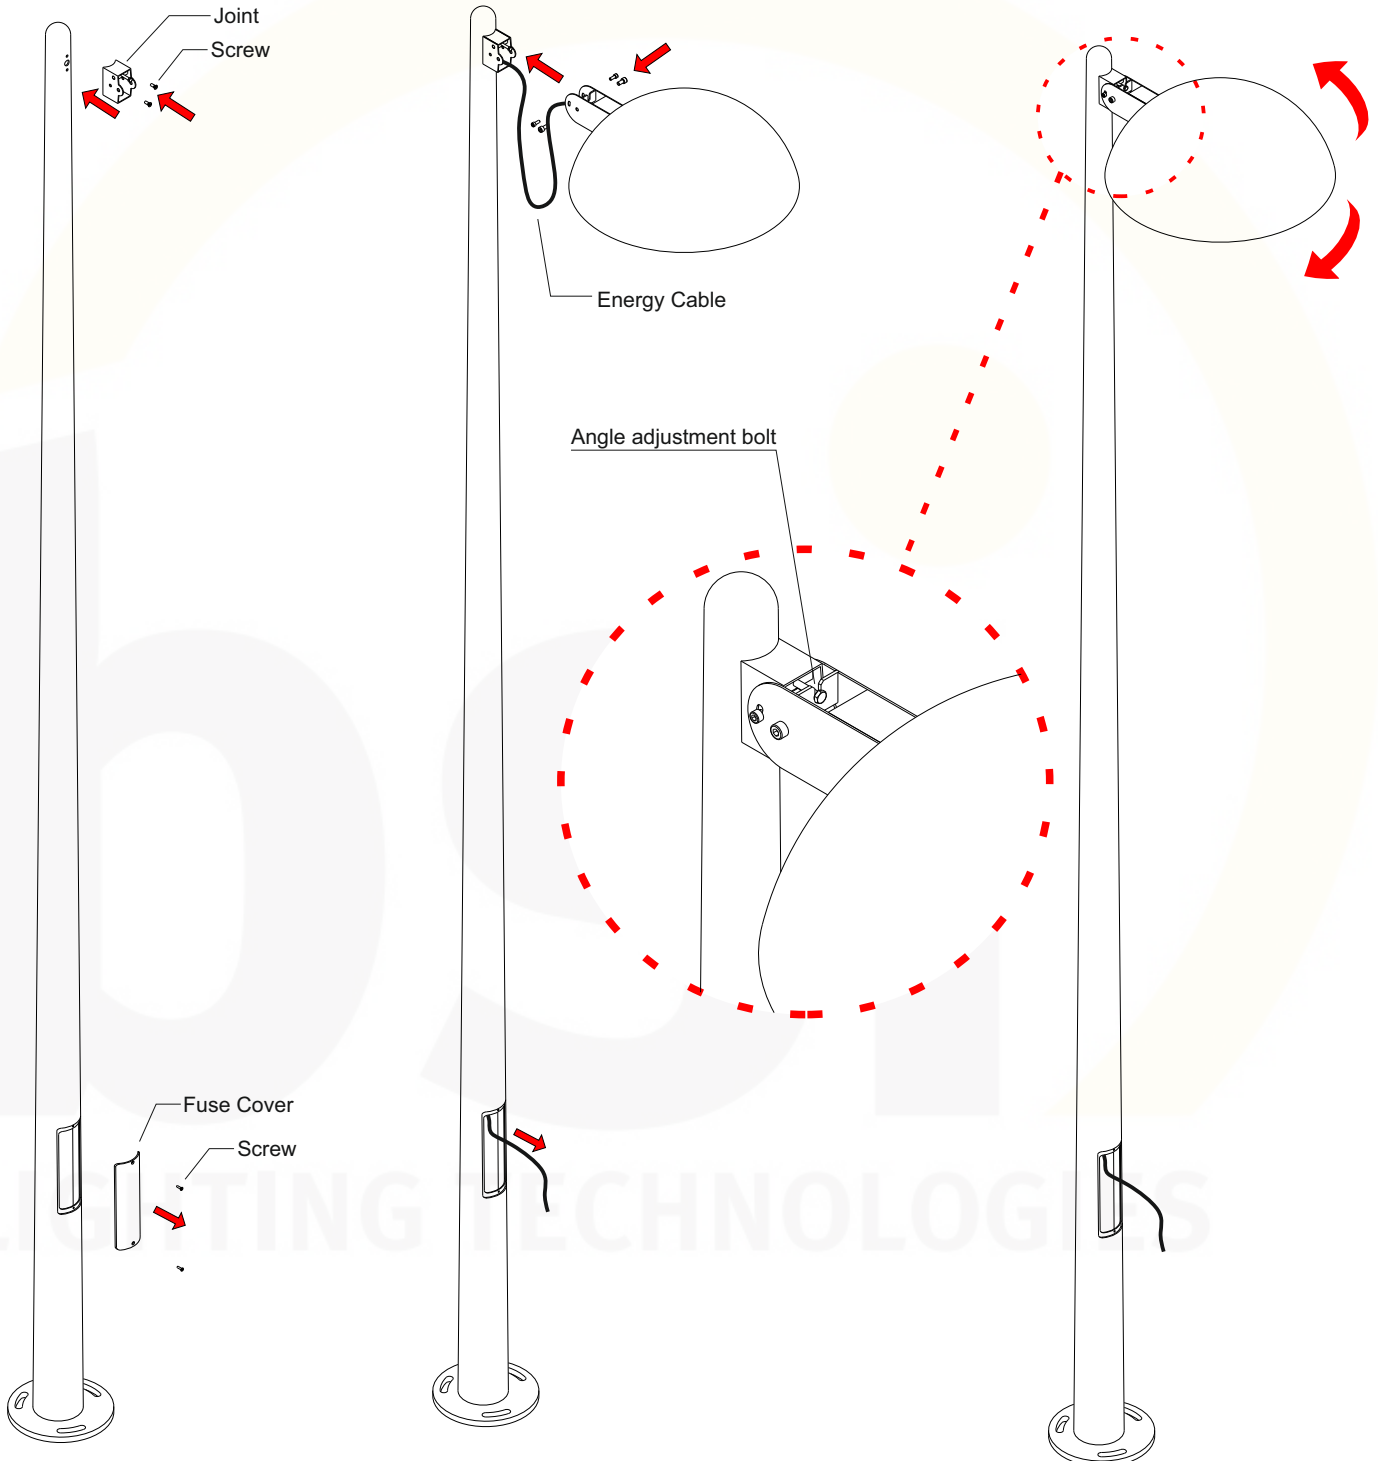

- 4) - The pole is fixed on the anchor and the washer-nuts are tightened.
- Fuse box is removed.
 - Electrical connection is done.
 - The fusebox and the fuse cover is re-mounted.

