

## Key Features

iAxis RGB-RGBW is a durable and virtually maintenance free surface mounted luminaire suitable for a wide range of wall washing, accent, surface grazing and indirect lighting applications in architectural, hospitality and retail environments. It has multiple customization options to illuminate interior walls, exterior facades and unique architectural details. Confirms vibration standards for bridge applications. Plug & Play system ensures easy installation, fast adjustment and intuitive programming with self-addressing.

Designed to last in extremely harsh environments. Suitable for wet locations with high protection rating and marine grade finish option.


RGB & RGBW, DMX or DALI controllable, easy to install with the integrated universal power supply and connect via combined power and data connectors.



## Key Data

<b>LED Type</b>	High efficiency LEDs RGB, 3-step MacAdams ellipse and LM80 compliant.
<b>Nominal Voltage</b>	220V-240V AC, 50/60Hz
<b>Color Rendering Index</b>	CRI ≥ 80 standard and CRI ≥ 90 on request.
<b>Optics</b>	Standard: 8° / 12° / 25° / 30° / 45° / 60° / 90° / 18°x38° / 10°x60° / 25°x50° Asymmetrical Linear Wallwash. Custom optics upon request.
<b>Materials</b>	Corrosion resistant extruded anodized aluminium housing (EN AW-6060) with stainless steel screws (A4 grade) and silicone rubber gaskets. End- to-end connection via power connectors. Includes adjustable mounting brackets. Power unit is built in.
<b>Optional Coating</b>	Marine grade.
<b>Diffuser</b>	High impact and heat resistant polycarbonate with UV protection.
<b>LED Life Time</b>	L80 B10 70.000h Ta 25°C L80 B10 50.000h Ta 40°C
<b>Operating Temperature</b>	-40°C / +55°C
<b>Power Factor</b>	>0.95
<b>Control Systems</b>	DMX / RDM
<b>Protection Class</b>	IP67
<b>Impact Resistance</b>	IK10
<b>Insulation Class</b>	Class I
<b>Conformity</b>	Complies with European Standards EN 60598 and CE certified.

### Technical Drawing

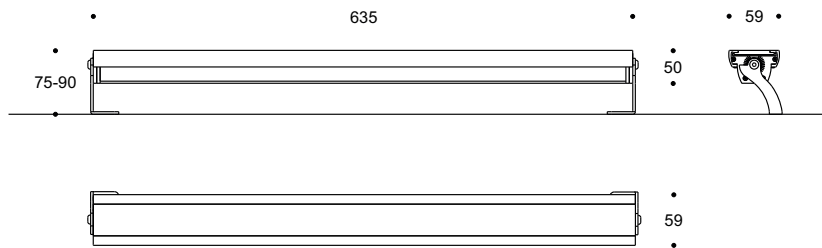

### Information

CODE	LENGTH (mm)	PITCH (mm)	LED QTY	POWER CONSUMPTION 350mA	POWER CONSUMPTION 500mA	LUMEN OUTPUT (lm) 350mA	LUMEN OUTPUT (lm) 500mA
AR9155331/RGB	635	33	18	18W	27W	1080	1620

### Light Distribution Curve



### Accessories



**Glare Shield**  
One Sided Code: GS2201  
Two Sided Code: GS2202



**IP68 Plug Power Connector Set (Two Pieces)**  
Code: CON1202